

Getting Started with MegaStat[®]

J. B. Orris

Butler University

Copyright 2005 by J. B. Orris

Table of Contents

1. Basic Procedures	2
Buttons	3
Data Selection	3
Entering values	5
Data Labels	5
Output	5
Repeat Last Option	6
Generate Random Numbers	6
Utilities	6
Insert descriptive information	6
ChartDataSheet utilities	6
Start new output sheet	7
Delete output sheet	7
Deactivate MegaStat	7
Uninstall MegaStat	7
Help/Information	9
Help System	9
About MegaStat	9
2. Tutorial Examples	10
Example 1: Frequency distribution	10
Example 2: Normal Distribution – entering values and modifying output	15
3. Reference	22
Descriptive Statistics	Error! Bookmark not defined.
Frequency Distributions	22
Quantitative	24
Qualitative	25
Probability	27
Counting Rules	27
Discrete Probability Distributions	28
Continuous Probability Distributions	28
Normal Distribution	29
t Distribution	31

F Distribution	32
Chi-square Distribution	32
Confidence Intervals / Sample Size	33
Confidence interval – mean	33
Confidence interval – p	33
Sample size –mean, p, and mean with specified α and β	34
Hypothesis Tests.....	35
Mean vs. Hypothesized Values	35
Compare Two Independent Groups	37
Paired Observations	37
Proportion vs. Hypothesized Value.....	38
Compare Two Independent Proportions	38
Chi-square Variance Test.....	39
Analysis of Variance	40
One-Factor ANOVA	Error! Bookmark not defined.
Randomized Blocks ANOVA	Error! Bookmark not defined.
Two Factor ANOVA.....	Error! Bookmark not defined.
Correlation / Regression.....	40
Scatterplot	43
Correlation Matrix.....	44
Regression Analysis	45
Predictor values from worksheet cells	45
Type in predictor values	46
Select Options:.....	46
Select Residuals options	47
Time Series / Forecasting	48
Trendline Curve Fit	48
Deseasonalization.....	49
Moving Average	50
Exponential Smoothing	50
Simple Exponential Smoothing	50
Two-factor Exponential Smoothing.....	51
Chi-Square / Crosstab	52
Contingency Table	52
Crosstabulation.....	53
Goodness of Fit Test	54
Nonparametric Tests.....	55
Sign Test	55

Runs Test for Random Sequence	55
Wilcoxon – Mann/Whitney Test	56
Wilcoxon – Signed Rank Test.....	56
Kruskal – Wallis Test.....	57
Friedman Test	58
Kendall Coefficient of Concordance.....	58
Spearman Coefficient of Rank Correlation.....	59
Fisher Exact Test.....	59
Quality Control Process Charts.....	60
Control chart for variables (Xbar and R chart)	60
Control chart for proportion nonconforming (p chart).....	60
Control chart for number of defects per sample (c chart)	60
Generate Random Numbers	61

Getting Started with MegaStat ®

J. B. Orris, Ph.D.

Butler University

MegaStat¹² is an Excel add-in that performs statistical analyses within an Excel workbook. After it is installed it appears on the Excel menu and works like any other Excel option. The purpose of this Getting Started document is to introduce you to how MegaStat works. The first chapter will describe the general operating procedures and conventions that are common throughout MegaStat. The second chapter will work through a few tutorials. The Reference section shows the dialog boxes for all of the options and notes briefly what data/input is expected and any unique aspects of each option.

While MegaStat is an excellent tool for learning statistics, this document focuses on using MegaStat and is not intended to teach statistics. Indeed, it assumes that you know what the various procedures do and are familiar with the terminology. It also assumes you have a basic working knowledge of Excel.

¹ MegaStat is copyrighted and is a registered trademark of J. B. Orris

² This document was written for version 10 of MegaStat; however, most of it will be relevant for other versions.

1. Basic Procedures

When you click on MegaStat the main Excel menu appears (Figure 1). Most of the menu options display sub-menus. If a menu item is followed by an ellipsis (...) clicking it will display the dialog box for that option.

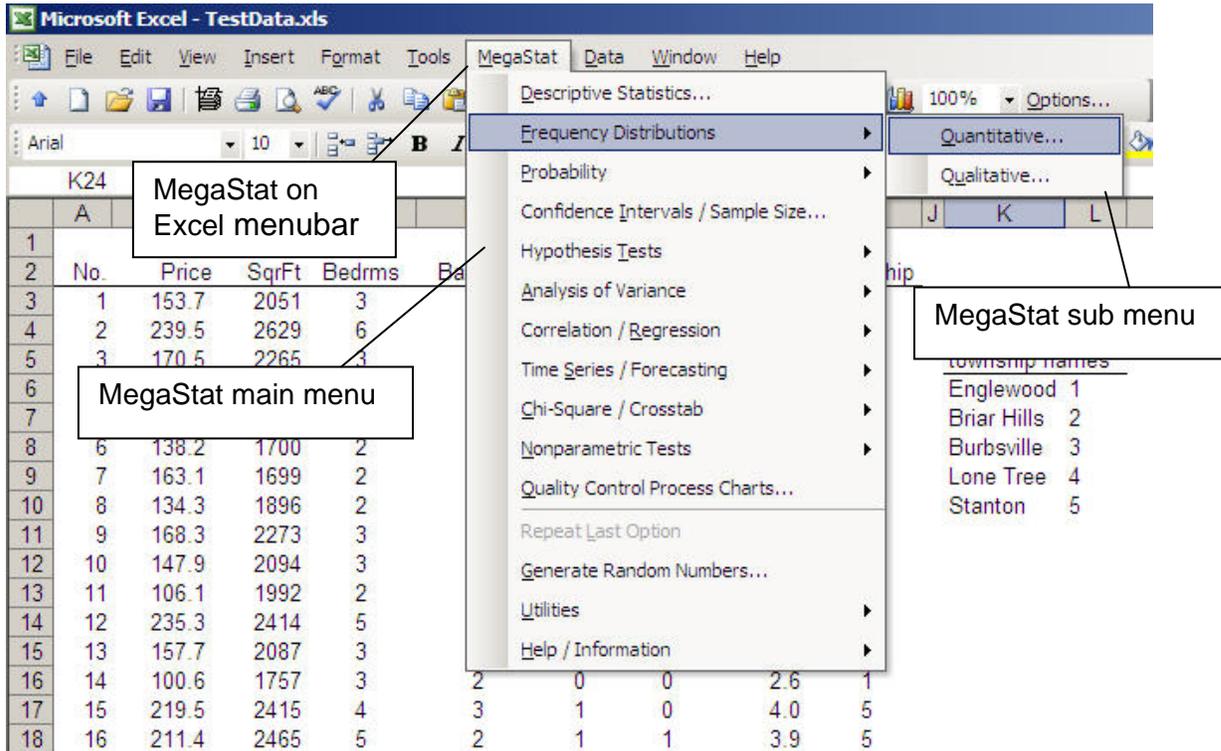


Figure 1. MegaStat menu

A dialog box allows you to specify the data to be used and other inputs and options. Figure 2 shows a typical dialog box. After you have selected the data and options you click OK, the dialog box disappears and MegaStat performs the analysis.

Before we look at specific dialog boxes let's take a minute to look at some issues that are common to all of the options. MegaStat use is intuitive and very much like other Excel operations; however, there are some features unique to MegaStat and some ways to make using it more efficient so it will be worth your time to look at the following material.

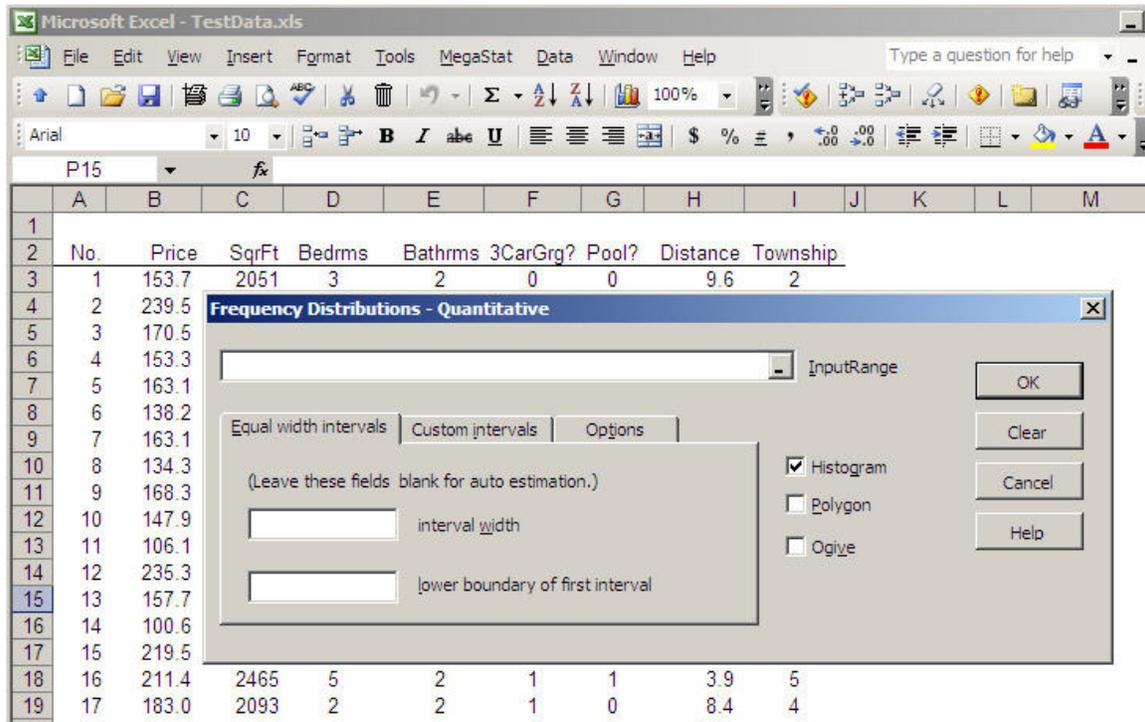


Figure 2. MegaStat dialog box

Buttons

Every dialog box has the four buttons shown on Figure 2.

- OK** This button could also be labeled “Calculate”, “Go”, “Execute” or “Do it”. It tells MegaStat that you are done specifying inputs and you are turning control over to it to do its thing. First your input values are validated and then the dialog box disappears and the output worksheet is displayed. When the dialog box disappears, it is still in memory and will contain the same inputs if recalled later.
- Clear** This button removes all input values and resets any default options on the form.
- Cancel** This button could be labeled “Never mind”. It simply hides the dialog box. The dialog box is not cleared or removed from memory. Userforms do not take much memory and there is no problem with having several of them in memory. However, if you really want to unload the form, click the “X” in the upper right corner of the form.
- Help** As you have guessed, this button displays context sensitive help for the active userform. If you want to see the full Help System, use the Help selection on the main menu.

Data Selection

Most MegaStat dialog boxes have fields where you select input ranges that contain the data to be used. Input ranges can be selected four ways:

1. Pointing and dragging with the mouse (the most common method).

Since the dialog box “pops-up” on the screen it may block some of your data. You can move dialog boxes around on the screen by placing the mouse pointer over the title bar (colored area at the top), clicking and holding the left mouse button while dragging the dialog box to a new location. You can even drag it partially off the screen.

You will also notice that when you start selecting data by dragging the mouse pointer, the dialog box will collapse to a smaller size to help you see the underlying data. It will automatically return to full size when you release the mouse button. You can also collapse and uncollapse the dialog box manually by clicking the Collapse button at the right end of the field. Clicking the button again will uncollapse the form. (Do not use the ‘X’ button to uncollapse a form.)

2. Using MegaStat’s AutoExpand feature

Pointing and dragging to select data can be tedious if you have a lot of data. When you drag the mouse down it is easy to ‘over-shoot’ the selection and then you have to drag the mouse back until you get the area correctly selected.

AutoExpand allows rapid data selection without having to drag through the entire column of data. Here is how it works:

- Make sure the input box has the focus. (Click in it or tab to it.) An input box has the focus when the insertion pointer is blinking in it.
- Select one row of data by clicking in one cell of the column you want. If more than one column is being selected, drag the mouse across the columns.
- The data range will expand to include all of the rows in the region where you selected one row when you do one of the following:
 - Double-click over the input field
 - Right-click over the input field
 - Left-click the label next to input box.

With a little practice you will find this is a very efficient way to select data. The only time you cannot use it is when you want to use a partial column of data. You should also be aware that the AutoExpand stops when it finds a blank cell; thus any summations or other calculations at the bottom of a column would be selected. It is good practice to leave a blank cell at the bottom of each column before inserting formulas.

Note: When using the above methods of data selection you may select variables in an alternate sequence by holding the CTRL key while making multiple selections.

3. Typing the name of a named range.

If you have previously identified a range of cells using Excel’s name box, you may use that name to specify a data range in a MegaStat userform. This method can be very useful if you are using the same data for several different statistical procedures.

4. Typing a range address

You may type in any valid Excel range address, e.g. B5:B43. This is the least efficient way to specify data ranges but it certainly works.

Entering values

If an input box requires a **single value**, you may do one of the following (make sure the insertion cursor is blinking in the box):

- Type a value into the box.
- Click on any Excel cell that contains a value. When you click on a cell, the cell address is shown in the input box. If you double-click the input box the address will change to the value in the cell.
- Type any formula that you could be entered into a cell. You do not have to type the '=' sign as you would in an Excel cell.
- Type a cell address, e.g. B6, or the name of a named cell.

Data Labels

For most procedures the first cell in each input range can be a label. **If the first cell in a range is text it is considered a label; if the first cell is a numeric value it is considered data.** If you want to use numbers as variable labels you must enter the numbers as text by preceding them with a single quote mark e.g. '2. Even though Excel stores times and dates as numbers, MegaStat will recognize them as labels if they are formatted as time/date values.

If data labels are not part of the input range, the program automatically uses the cell immediately above the data range as a label if it contains a text value.

If an option can consider the entire first row (or column) of an input range as labels, any numeric value in the row will cause the entire row to be treated as data.

If the program detects sequential integers (1,2,3...) in a location where you might want labels it will display a warning message otherwise the rule is: **text cells are labels, numeric cells are data**³.

Output

When you click OK on a MegaStat dialog box it performs some statistical analysis and needs a place to put its output. It looks for a worksheet named Output. If it finds one it goes to the end of it and appends its output; if it doesn't find an Output worksheet it creates one. MegaStat will never make any changes to the user's worksheets, it only sends output to its Output sheet.

MegaStat makes a good attempt at formatting the output but it is important to remember that the Output sheet is just a standard Excel worksheet and can be modified in any way by the user. You can adjust column widths and change any formatting that you think needs improvement. You can insert, delete and modify cells. You can copy all or part of

³ An exception is the Crosstabulation option that can count text data.

the output to another worksheet or to another application such as a word processor.

MegaStat charts get their values from cells on the Output sheet (or one of your worksheets in the case of the Scatterplot). You can click a chart and select 'Source Data' to see what values are being displayed.

When you click a chart the MegaStat menu item will disappear from the main menubar since the Chart menu becomes active. Click outside the chart to bring back the main menu that contains the MegaStat menu item.

When the program generates output it adjusts column widths for the current output. If you have previous output from a different option already in the Output sheet, the column widths for the previous output may get messed up. You can attempt to fix this by manually adjusting the columns widths or by always starting a new output sheet.

The Utilities menu has options for deleting the Output sheet or making a copy of it and starting a new one.

Repeat Last Option

Once you have performed a MegaStat option, this menu selection will allow you to re-display the last dialog box without having to go through the menu selections. This can be handy if you need to make a change or when you need to repeat the same operation with the different data sets.

Generate Random Numbers

This option allows you to create random numbers. It is described on page 49.

Utilities

The Utilities menu contains some items that perform useful functions.

Insert descriptive information

This option is used for identifying output. It will insert rows with labels for Description, Name, Data source, Time and Version. You then use the adjacent cells to type in the appropriate information. Figure 7 in the next chapter shows an Output sheet after clicking this option.

The Data source line will show the name and location of the active workbook and the most recently accessed worksheet. The Time entry will show the current time/date and the version of MegaStat.

This option is not limited to MegaStat output sheets – it can be used on any Excel worksheet.

ChartDataSheet utilities

In order to display a graphical output (e.g., a chart) Excel must reference values in a worksheet. If the values are not available as a part of the output sheet, MegaStat stores them in a hidden worksheet called "ChartDataSheet_". If MegaStat needs a ChartDataSheet it creates one unless one already exists, in which case it appends its values to the end.

The following options use ChartDataSheets:

- Descriptive Statistics – BoxPlot
- Regression Analysis – Plot residuals by X values
- Regression Analysis – Normal Probability Plot
- Quality Control Process Charts

In general you do not need to be concerned with ChartDataSheets; however, the following utilities exist for advanced users.

View

ChartDataSheets exist only to provide values to charts and thus the output is not labeled. However, at the top of each output section is a label telling what type of chart it is used for and a time/date stamp. Under the corresponding chart there is also a time/date stamp so you can associate the data with a chart.

If you change or delete any of the values on ChartDataSheet the corresponding chart will be changed.

Hide

This will hide the ChartDataSheet after viewing it. You can also use Excel's Format | Sheet command to view/hide ChartDataSheets.

Delete

You would use this option if you wanted to delete a ChartDataSheet that no longer has any associated charts. If you delete a ChartDataSheet that has an existing chart, the chart will still exist but will not have any values plotted. There is no UnDo so make sure before you click OK.

Start new output sheet

If there is an existing Output sheet it will be renamed Output(2) so that your next output will be on a fresh Output sheet. You can rename Output(2) to whatever you wish by double-clicking the name tab.

Delete output sheet

This option deletes the current Output sheet. It will present a warning message because there is no way to recover a sheet once it is deleted.

Deactivate MegaStat

This option is used to remove the 'MegaStat' item from the main menubar. It does not delete any files or uninstall MegaStat. To restore the 'MegaStat' menu item click the tools Tools | Add-Ins item on the Excel's main menubar and then check the MegaStat option that you will see in the list of available add-ins.

Uninstall MegaStat

This menu item does not actually uninstall MegaStat. It displays a dialog box prompting you on how to start the uninstallation process described below.

Uninstalling is the process of removing the installed MegaStat files from your system. It does not remove any data files nor does it remove the file you used to

install MegaStat. You may delete the installation file (MegaStat_Setup.exe) if it is still on your system.

Uninstall steps:

1. Deactivate MegaStat using the Utilities menu
2. Exit Excel
3. Click: Start | Settings | Control Panel | Add/Remove Programs
4. Find MegaStat in the list of programs, click it and then click the Add/Remove button

[If you installed MegaStat manually without using a setup program you uninstall it by finding and deleting: Megastat.xla and Megastat.hlp.]

Help/Information

Help System

This option displays the full MegaStat help program.

The 'How it works (General Operating Procedures)' section contains all of the information in this tutorial. You can click specific topics or search for a particular item by clicking on Index.



Figure 3 MegaStat Help System

About MegaStat

This option displays current version information. There are also links for the MegaStat website and e-mail for tech support. These links will only work if you have an active Internet connection and your system is setup to properly respond to Internet and e-mail links.

The form also contains a **System Information** button, which causes the form to expand and display some technical information regarding system parameters and file locations. If you click the Insert button, the information will be placed in the current Output sheet. If you click Hide System Information, the form will go back to its original size.

2. Tutorial Examples

Although MegaStat performs many different statistical options the various dialog boxes all work the same way and have standard Excel objects (input boxes, buttons, checkboxes, etc.). Thus it is not necessary to show graphical examples of every MegaStat option. This chapter will work through a few detailed examples and will point out a few things that are unique to MegaStat. The next chapter will provide a reference source for the various options.

Example 1: Frequency distribution

The first tutorial example will perform a quantitative frequency distribution on the Price variable of the Sheet1 worksheet of the Testdata.xls workbook. If you want to work through this example, start Excel and open Testdata.xls and click on the Sheet1 worksheet tab.

- Open the Quantitative Frequency Distributions dialog box by clicking: MegaStat | Frequency Distributions | Quantitative. (As shown on pages 2 and 3)
- Click the Help button. Review the Help screen and then exit Help.

Since we want to do the frequency distribution on the Price variable we need to select all the data in column B. This example will illustrate the use of the AutoExpand feature although you could get the same result with any of the other methods of data selection.

- Make sure the insertion cursor is blinking in the input box. If necessary, click in the box with the left mouse button.
- Click anywhere in column B, e.g. cell B6
- Place the mouse pointer over the input box label and click the left mouse button.

Figure 4 shows the dialog box at this point.

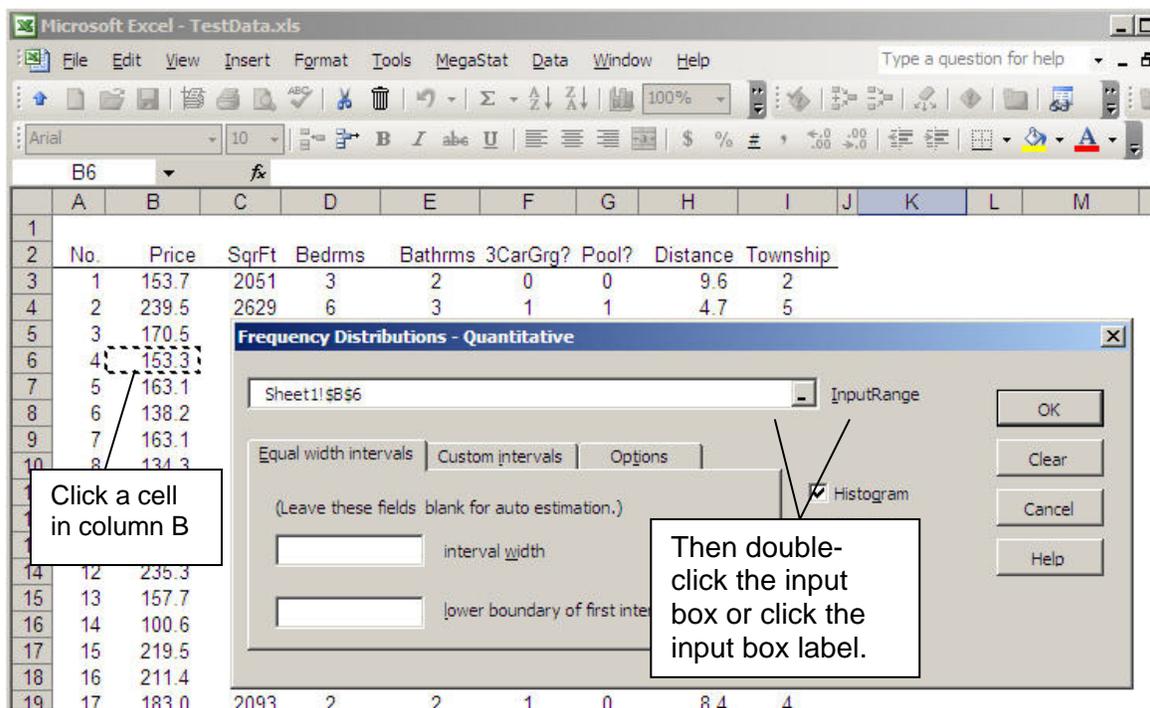


Figure 4. Illustration of AutoExpand

After clicking the label, the dialog box appears as follows with all of the data in column B being selected. The selection expands up/down until it encounters a blank cell or the top/bottom of the column.

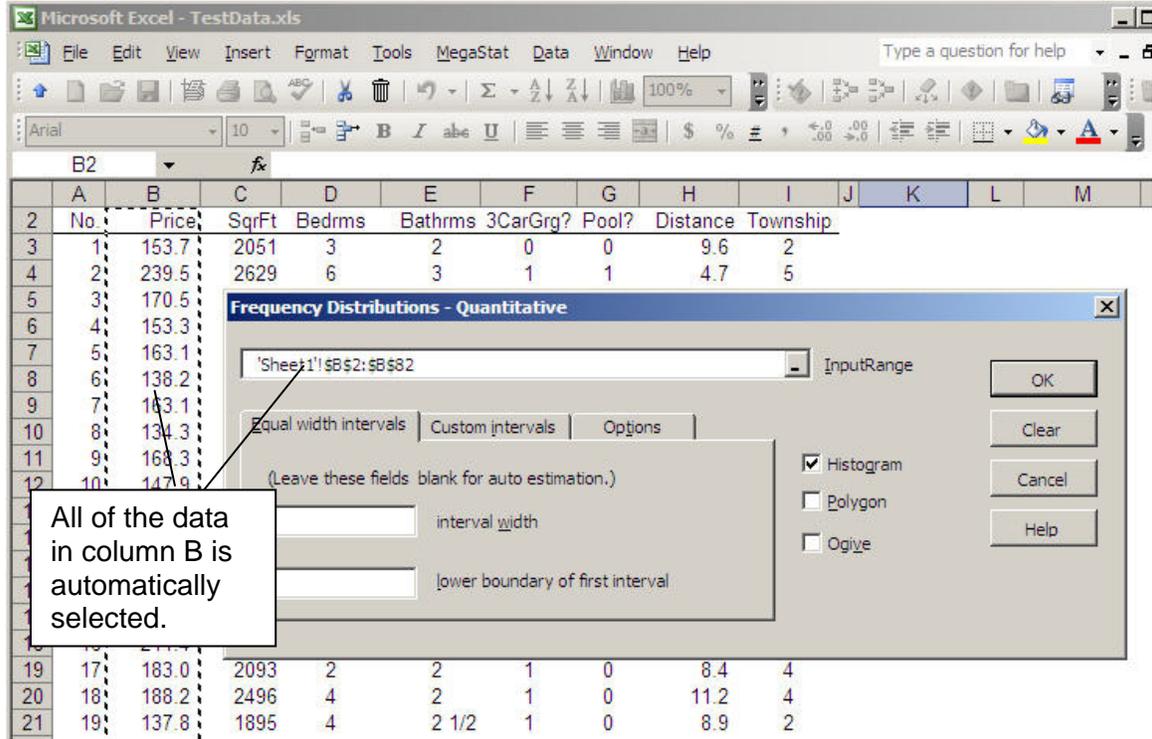


Figure 5. All of the data in column B is selected.

- f. Type 50 in the Interval width box and click each of the checkboxes. Click OK.

Determining the proper number to enter is something you will learn in your statistics course. If you leave either input box empty the MegaStat will calculate an appropriate value. Prior to clicking OK the dialog box will look like Figure 6.

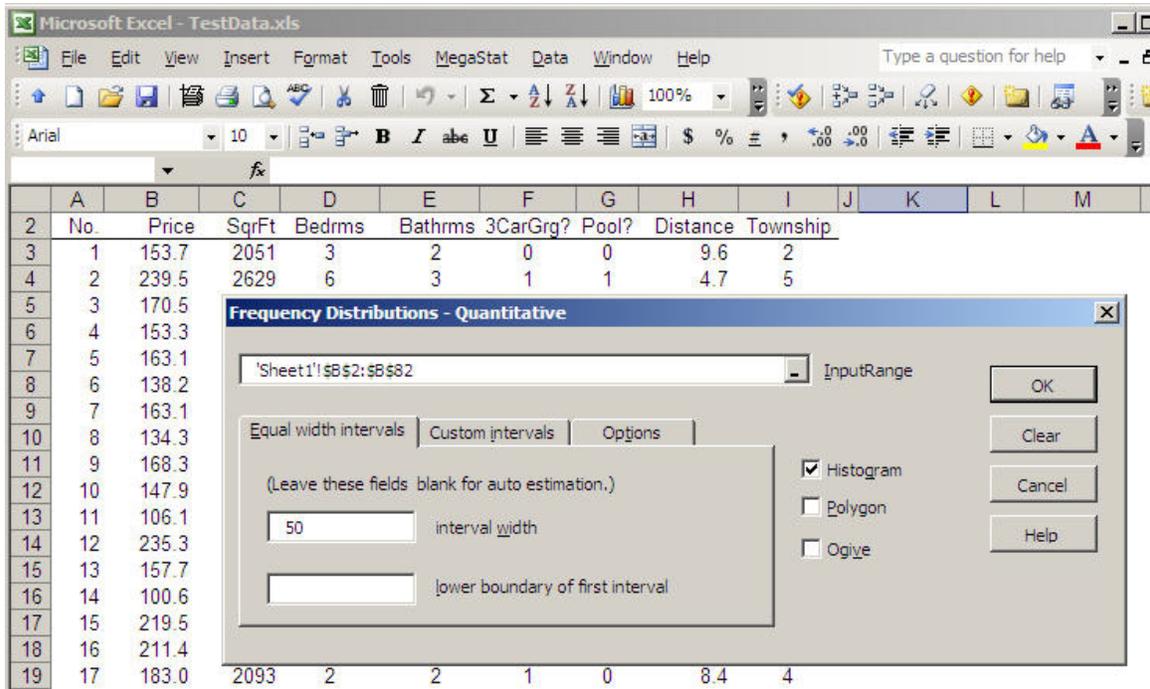


Figure 6. Completed dialog box waiting for OK click.

After you click OK the dialog box disappears and MegaStat does the requested calculations. A new Output (shown in Figure 7) is created and displayed. If there were already an Output sheet MegaStat would have appended the new output to the end.

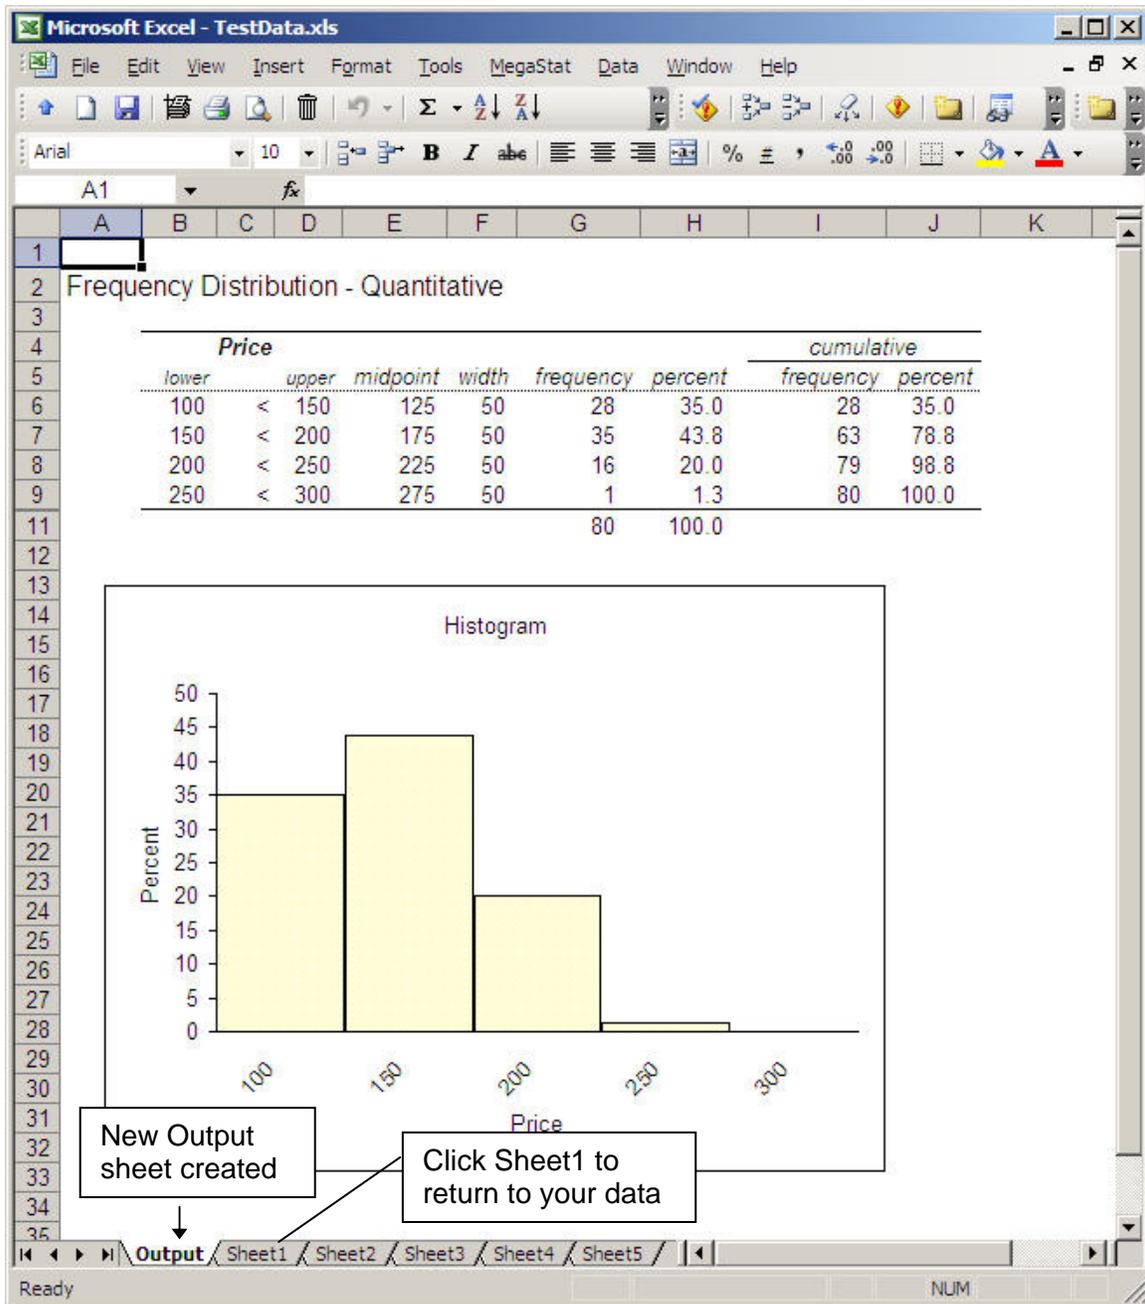


Figure 7. MegaStat Output sheet

The amount displayed on your screen will be different depending on the size of your screen. You may need to use the vertical and/or horizontal scrollbars to view the entire output.

The Output sheet is just an Excel worksheet and it can be formatted and manipulated just like any other worksheet. You may change the font style / size / color; increase / decrease decimal places; add annotations, etc.. However, you do need to be careful if you delete part of the output. For example, if you delete the midpoint cells, the Frequency Polygon cannot be plotted.

Also note that the charts are Excel charts and may be edited also to change colors, axis scaling and anything else. One thing you should routinely do is change the generic title (e.g. 'Histogram') to something more meaningful and relevant to the data.

Remember that when you are editing charts the Excel Chart menu takes over the Excel menubar and the MegaStat menu item is not visible. Click outside the chart to bring back the standard menubar.

[Insert descriptive information](#)

If you are submitting MegaStat output as part of a report or homework project you can have MegaStat insert descriptive cells.

g. Click in cell A2 and then click MegaStat | Utilities | Insert descriptive information.

This will insert rows with descriptive labels (as shown in Figure 8) and you can type in the appropriate information.

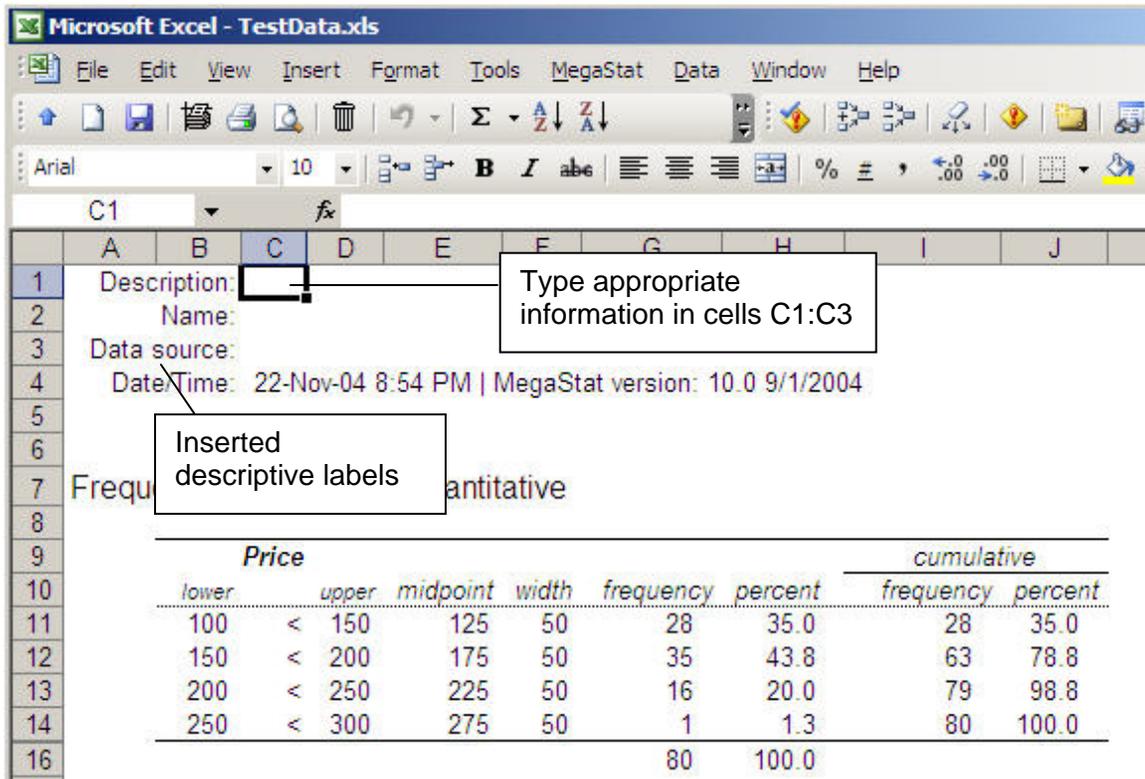


Figure 8. Inserted descriptive information.

Example 2: Normal Distribution – entering values and modifying output

Most MegaStat options work with data; however, some options use other types of input. For example, when using probability distributions you need to specify the appropriate input values. The tutorial example will use the normal distribution dialog box but the concepts apply also to other MegaStat options.

To run this option you must specify values for z, mean, and standard deviation. The default values for the mean and standard deviation are 0 and 1 which means the input would be a z value; however, you may specify any mean and standard deviation.

For example, using the TestData.xls file, what is the probability that a house would be less than 2500 square feet? Let's first use the Descriptive Statistics option to find the mean and standard deviation.

- a. Open TestData.xls
 - b. Run MegaStat | Descriptive Statistics with the default options for the SqrFt variable.
 - c. Locate the cells that contain the mean and standard deviation. If you started a new output sheet, the mean and standard deviation should be in cells B6 and B7.
 - d. (optional) Run MegaStat | Frequency Distributions | Quantitative on the SqrFt variable to verify that the distribution is approximately normal.
 - e. Select MegaStat | Utilities | Start new output sheet. This will rename the Output sheet Output(2) so our next output will be on a fresh sheet.
- a. With the Output(2) worksheet selected, open the Normal Distribution dialog box by clicking: MegaStat | Probability | Normal Distribution.

The dialog box appears as shown in Figure 9

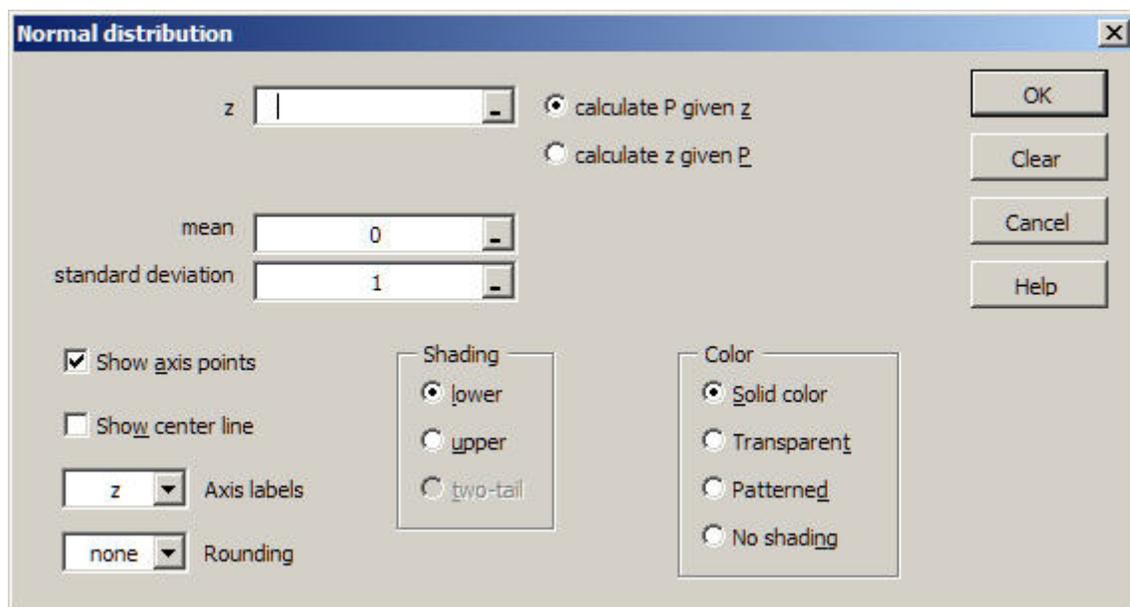



Figure 9 Normal distribution dialog box.

You could just type the mean and standard deviation in the boxes but let's get the values from the cells.

b. Click in the mean box and then click in the B6 cell.

c. Click in the standard deviation box and then click in the B7 cell.

The boxes should now look like this:

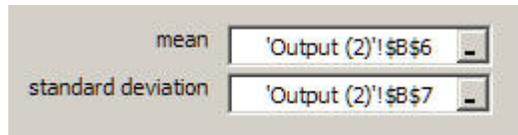

It is OK to leave the boxes like this; however, if you double-click each of the boxes the actual numbers will be shown and the dialog box will appear as shown in Figure 9b

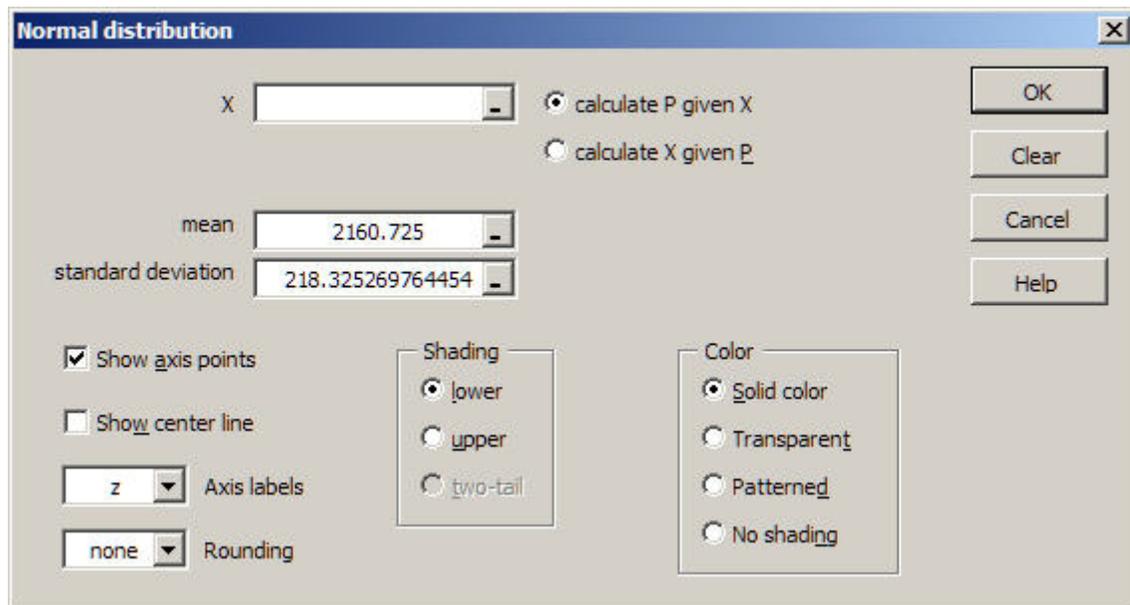


Figure 9b Normal distribution dialog box with mean and standard deviation.

Notice that an advantage of selecting the cell rather than typing in the values is we get the full accuracy of the values since you would probably have typed in the rounded values. However, if you did not want all of the decimal places you could click the cells and edit the values.

Note that the input labels that were 'z' in Figure 9 are now labeled 'X' since the mean and standard deviation are no longer 0 and 1.

If a cell contained the X value, you could also click in that cell but we will just type it in. We will also specify the X axis labels and round the calculated z value to two places so the output will correspond to table values.

d. Click in the input box for X and type 2500.

- e. Click the dropdown arrow for Axis labels and select 'X'
- f. Click the dropdown arrow for Rounding and select '2'.
- g. Click OK and the output will appear as shown in Figure9c.

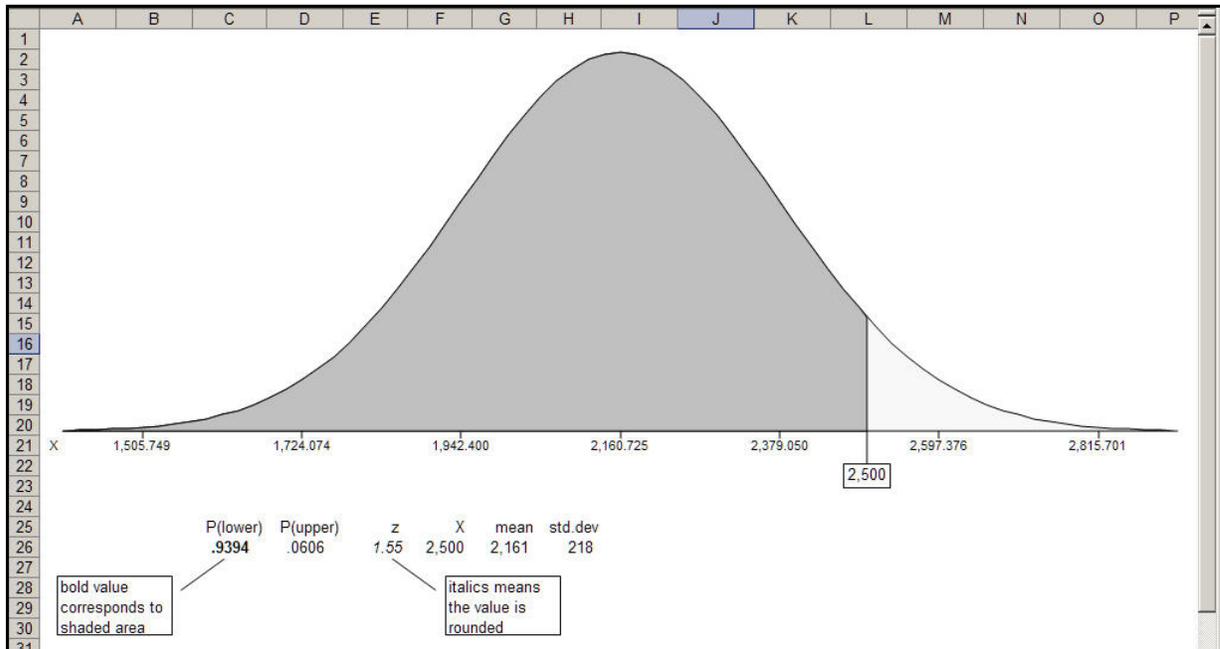



Figure 9c. Output from the normal distribution option.

Note that in addition to the graphical output the input values and the calculated values are also shown. The probability shown in bold corresponds to the shaded area. The z value in italics means that it is a rounded value, not just formatted, *i.e.*, if you click in the cell you will see the value is actually 1.5500000000. If you don't want the bold and italics formatting, you can click in those cell and change it, indeed you can change any of the output. For example, you may want to click in the cells with the mean and standard deviation and increase the number of decimal places to correspond to axis values.

We will now calculate the value for a 2000 square foot house and superimpose the output on this display.

- h. Click MegaStat | Repeat Last Option (or MegaStat | Probability | Normal Distribution).

Note there is new checkbox near the OK button:

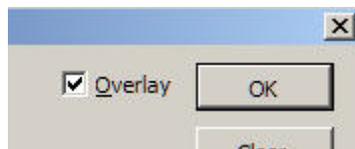

When the Overlay option appears it is checked by default which means the next output will be superimposed on the previous output. If you uncheck it, a new output will be created. For this example we will leave it checked.

- i. Enter 2000 into the 'X' box.
- j. Select 'Transparent' in the Color box and click OK.

The new output is now shown in Figure 9d.

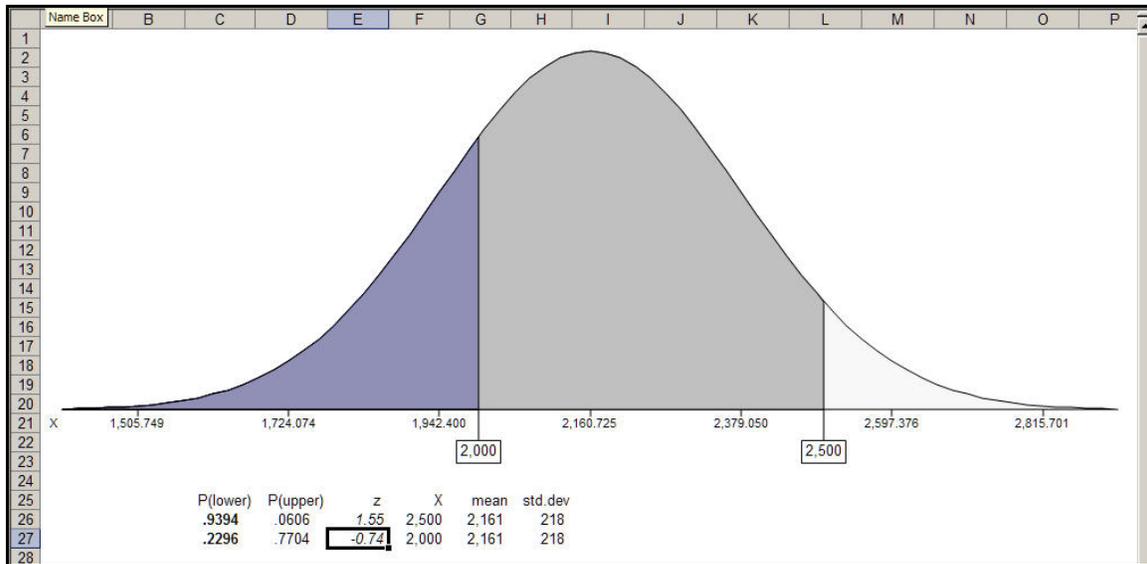


Figure 9d. Normal distribution with two areas shown.

If you wanted to find the probability of a house being 2000 and 2500 square feet you could click in cell C29 (or an empty cell) and type =C27-C28 to subtract the two probabilities. Try it.

Although the new area is transparent it would be more evident if the original area was patterned. We could go back and re-do the output and specify patterned instead of solid color; however, we will show how you change it on the output (and in the process see how you can do all kinds of fancy and colorful output).

Each of the shaded areas (and the axis labels) are separate graphical objects that can be edited. For this example we will change the larger shade area to brick pattern.

- k. Double-click the larger shaded area (the area between 2000 and 2500) to display the Format AutoShape dialog box.
- l. Click the Fill | Color dropdown and click Fill Effects... to display the Fill Effect dialog box.

- m. Click the Pattern tab. Click the Diagonal brick pattern. Click the Foreground dropdown and select Gray-50%.

The dialog boxes will now look like Figure 9e.

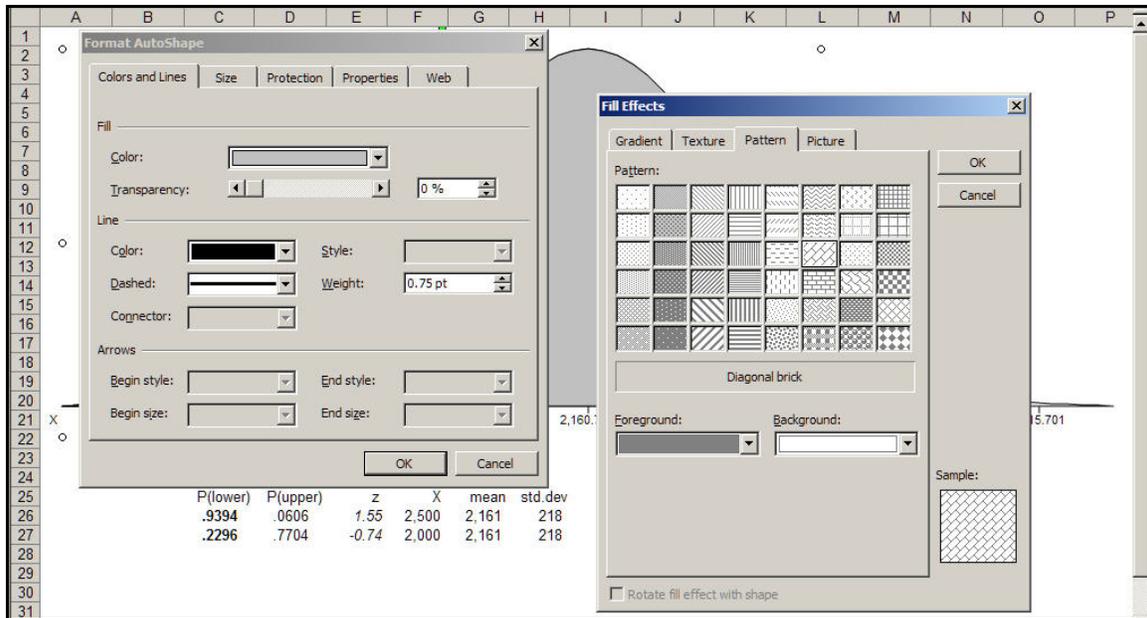


Figure 9e. Creating a patterned output.

- n. Click OK on each the boxes.

Your output will now look like Figure 9f.

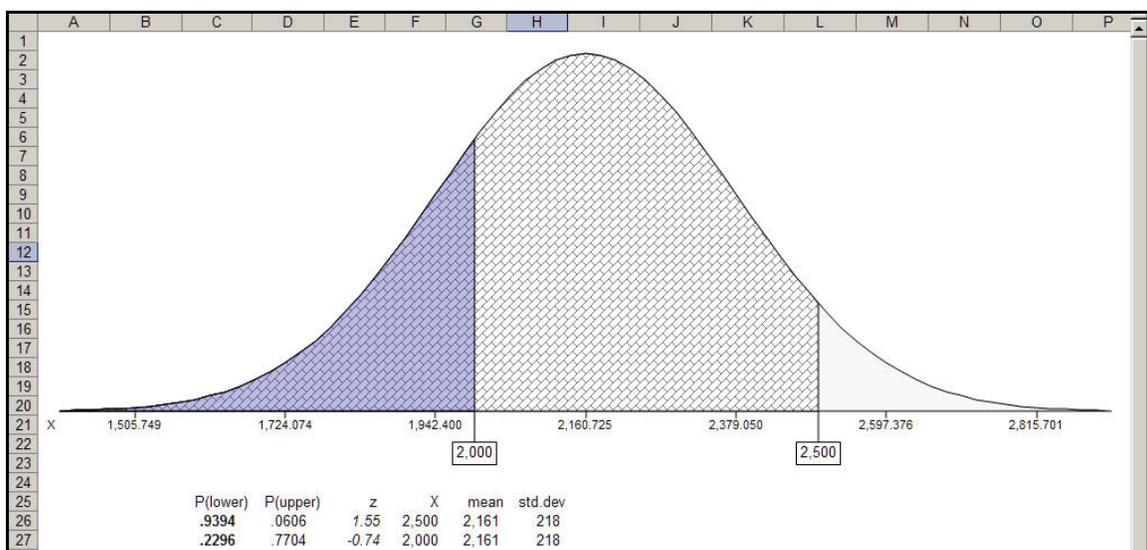


Figure 9f. Output modified to show a patterned fill.

Notice how the patterned fill with the transparent overlay emphasizes that the probability for 2500 goes all the way to left.

When working through the steps above you probably saw many other possibilities for color, gradients, textures and patterns. You can even put a digital picture in the areas. Try some of them. The textures and preset gradients are especially interesting.

Example 3: Entering Proportions

Several MegaStat dialog boxes require that you enter proportions. This particular example calculates the confidence interval if the sample proportion is 11/38. You could enter the decimal value of 0.28947368421; however, this would be time consuming and error prone. It would be better to just enter the fraction as shown in Figure 10.

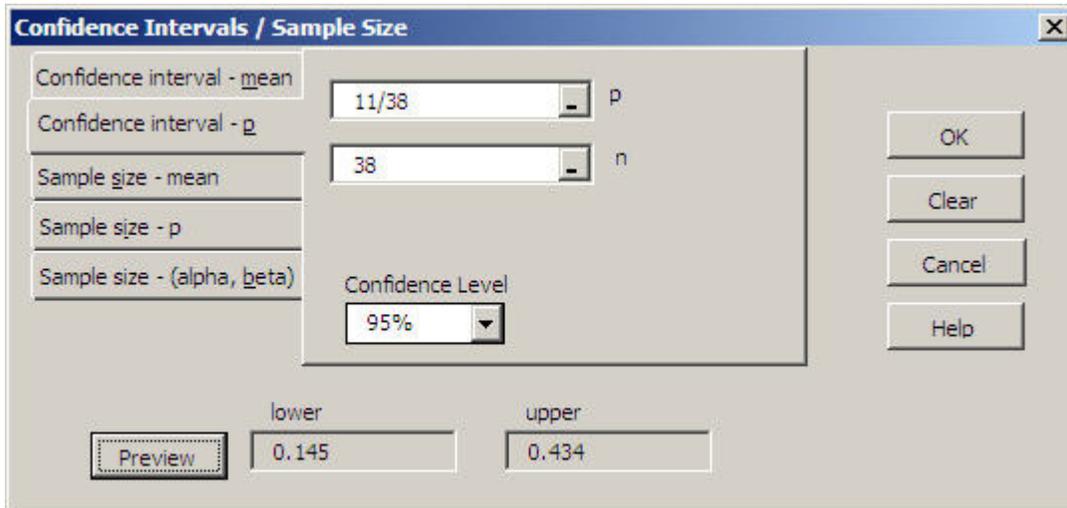


Figure 10. Proportion entered as a fraction.

An even better method is to just enter the numerator portion of the proportion and the program will divide the n value entered in the n box. When you enter a value in the p box that is greater than or equal to 1, the label automatically changes to x and the program knows that is supposed to divide by n (see Figure 11).

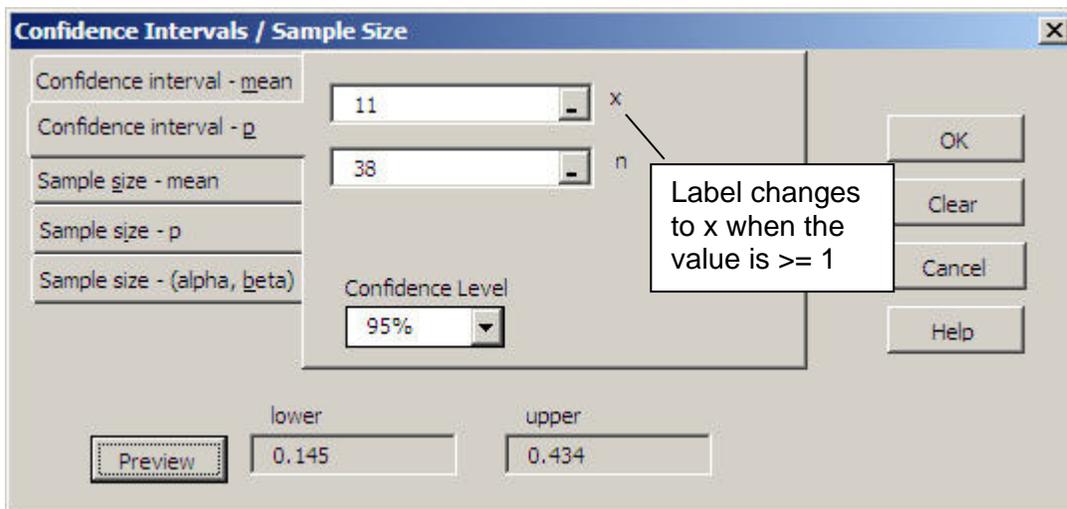


Figure 11. Proportion entered by typing only numerator.


This method works whenever MegaStat requires a proportion.

If a worksheet cell contains a proportion you also can click on that cell as shown in Example 2.

3. Reference

This section lists MegaStat options and briefly discusses any issues relevant to the option. Each dialog box is displayed; however, only features and procedures that are not self-apparent are discussed.

Descriptive Statistics

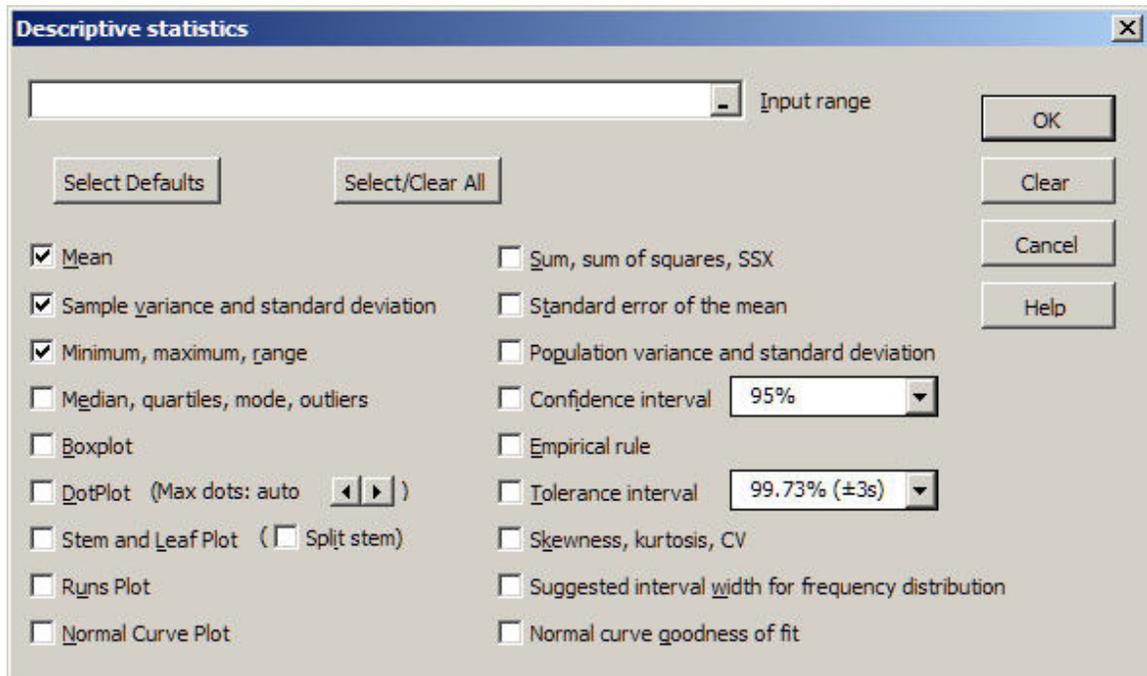

The Select Defaults button selects the options shown. Select/Clear All toggles 'Select All' and 'Clear All' options.

Note 1: The option that calculates **outliers** defines outliers and extremes as follows:

Let: $Q1 = 25^{\text{th}}$ percentile
 $Q3 = 75^{\text{th}}$ percentile
 $H = Q3 - Q1$ (the interquartile range)

An outlier is defined as any value less than $Q1 - 1.5 \cdot H$ or greater than $Q3 + 1.5 \cdot H$

An extreme is defined as any value less than $Q1 - 3.0 \cdot H$ or greater than $Q3 + 3.0 \cdot H$

Note 2: Boxplot fences

If the data contains outliers or extremes (see Note 1) they are plotted individually on the boxplots and the fences are displayed as dashed vertical lines. Fences are the values that define outliers and extremes.

Note 3: Boxplot and DotPlot charts

The data values needed to display the chart(s) are stored in ChartDataSheets as discussed in the Utilities section. If you paste the chart into another application

you might want to do a Paste Special | Picture that does not require a link to these values.

Note 4: DotPlot option

You can select the number of stacked dots; however, this is done by rounding the data so you may not get exactly the number of dots you specify.

Note 5: Normal curve goodness of fit

This option uses the mean and standard deviation of the data to determine the intervals boundaries that would divide a normal distribution into equal-probability intervals. The number of intervals is determined by Sturge's rule: $1 + \log_2(n)$. The row header for the observed values shows the z-value corresponding the upper end of each interval.

The program then calculates the frequency distribution. The expected frequencies are $n/(\text{number of intervals})$. If the data are normally distributed each interval should have the same number of observations.

Interpretation: A larger p-value indicates that the observed distribution closely matches a normal distribution. As the p-value gets smaller the fit is not as good. If the p-value is under .05 you would reject the hypothesis that the data could have come from a normal distribution.

Note: The sample size for the first variable is used to determine the number of intervals for all of the variables. If some of the other variables contain substantial amounts of missing data you should run the test on them individually.


Frequency Distributions

Quantitative

The basic operation of this option is described in the Tutorial Example section above.

If the interval width or lower boundary boxes are left empty, MegaStat will attempt to calculate appropriate values: To estimate the interval width it first calculates the range of the data excluding any outliers or extremes. It then determines the interval width by the method discussed in David P. Doane "Aesthetic Frequency Classifications", The American Statistician, November 1976, Vol 30, No. 4.

If your data includes outliers the resulting frequency distribution will probably have some empty intervals in order to reach the outliers. You might exclude some data or consider custom intervals. The dialog box for frequency distributions with equal width intervals is shown and discussed in the Tutorial Example section above. However, when you have a wide range of data, perhaps with some outliers you would click the Custom Intervals tab and the dialog box would appear as follows:

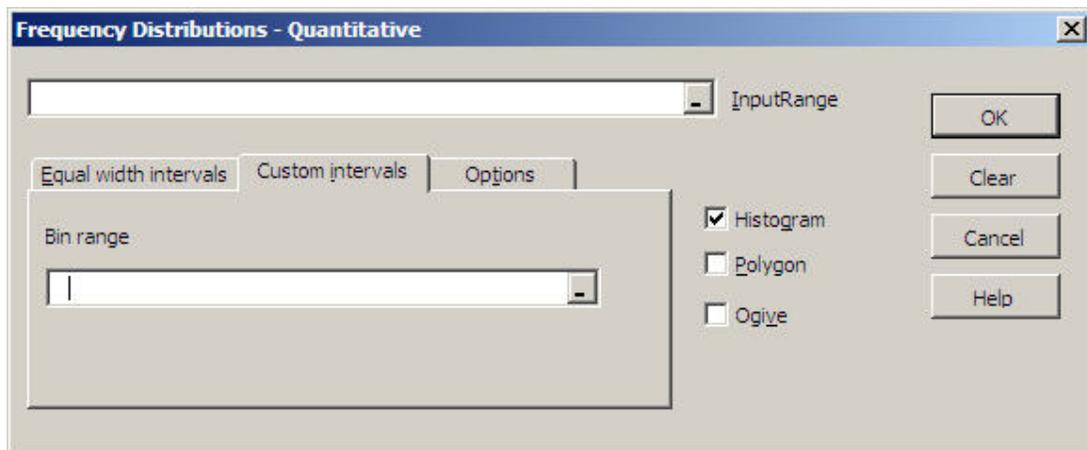

Use this option to specify unequal width or open-ended intervals. Select the worksheet cells (called the 'bin range') containing the interval boundaries. Each cell will be the lower boundary of an interval except for the last cell, which will be the upper boundary of the last interval. The values must be selected in a single column.


Example: The following bin range

0
100
200
1000
4000
10000

Would create the following intervals:

lower	upper
0	99.99
100	199.99
200	999.99
1000	3999.99
4000	10000.00

Qualitative

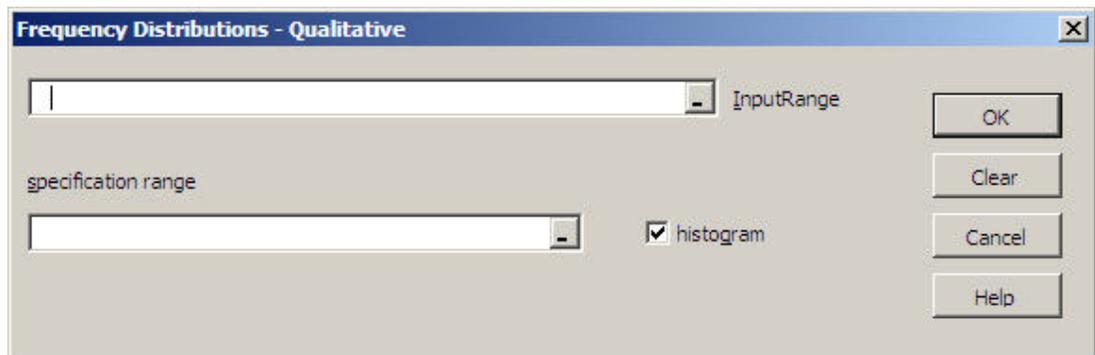

A qualitative frequency distribution is used to count the number of occurrences of specified data values. A **specification range** is used to specify what values are to be counted.

Suppose you had a variable representing five townships coded 1-5. If you wanted to include the name of the townships on the output you would select cells C6:D10 as the specification range as shown below. (Note: the cell borders shown are not required as a part of the specification range.)

	A	B	C	D	E	F	G
1	Twnship						
2	5						
3	4						
4	3						
5	2						
6	1	Englewood	1				
7	1	Briar Hills	2				
8	3	Burbsville	3				
9	2	Stanton	4				
10	1	Lone Tree	5				
11	4						
12	3						

Suppose townships 1, 3 and 4 were in the eastern part of the city and townships 2 and 5 were in the western part. If you wanted to count the number of homes in the East and West region you would set the specification range as shown below. Values

listed on the same row are counted in the same category. If no label is specified, the left hand data value would be used as the label.

Any data values not listed in the specification range are ignored.

	A	B	C	D	E	F
1	Township					
2	2					
3	5					
4	2					
5	3		East	1	3	4
6	3		West	2	5	
7	2					
8	3					
9	1					

specification range

MegaStat also allows qualitative data in the data range. For example, if the Garage variable was coded Yes and No the specification range would be as follows:


	A	B	C	D	E	F
1						
2	Garage					
3	Yes					
4	No		Yes			
5	No		No			
6	No					
7	No					
8	Yes					
9	Yes					

specification range

If you enter qualitative data as text it must be typed exactly the same way every time and it is case sensitive: Yes and yes would be two different responses. You could get around this by typing Yes and yes on the same line in the specification range but generally it would be better to enter numeric values such as 0 and 1. These could also be used as indicator variables in regression.

Probability

Counting Rules

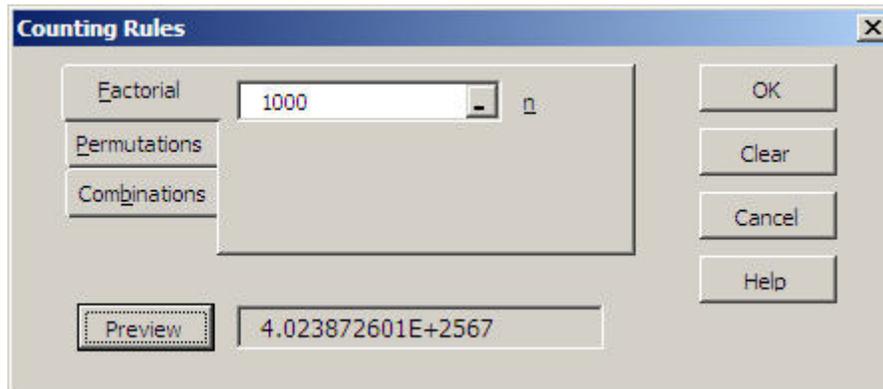


The largest number Excel can handle is approximately $1.0E306$, i.e., a number with 306 places to the right of the decimal. That is certainly a large number but factorial/permutation/combination calculations often generate larger values. The largest factorial that can be displayed as a number is $170!$. Values larger than that are calculated but the results are shown in text format. The Preview example above shows $1000!$

Technical note: The output also includes the natural log of the answer. You may use this value for further computations and testing. For example, to verify that the factorials are correct, recall that $n!/(n-1)! = n$, therefore $\exp(\ln(n!) - \ln((n-1)!))$ should equal n , e.g. $\exp(\ln(1000!) - \ln(999!)) = 1000$. Values larger than $10,000,000!$ start to show a little error but the percent error is very small. These computations are shown below in cell E17:

	A	B	C	D	E	F
1						
2	Factorial/Permutations/Combinations					
3						
4		1000	n			
5		4.023872601E+2567	n!, n factorial			
6						
7		5912.128	LN(n!)			
8						
9						
10	Factorial/Permutations/Combinations					
11						
12		999	n			
13		4.023872601E+2564	n!, n factorial			
14						
15		5905.220	LN(n!)			
16						
17					=EXP(B7-B15)	
18						
19						

1000.0000

Discrete Probability Distributions

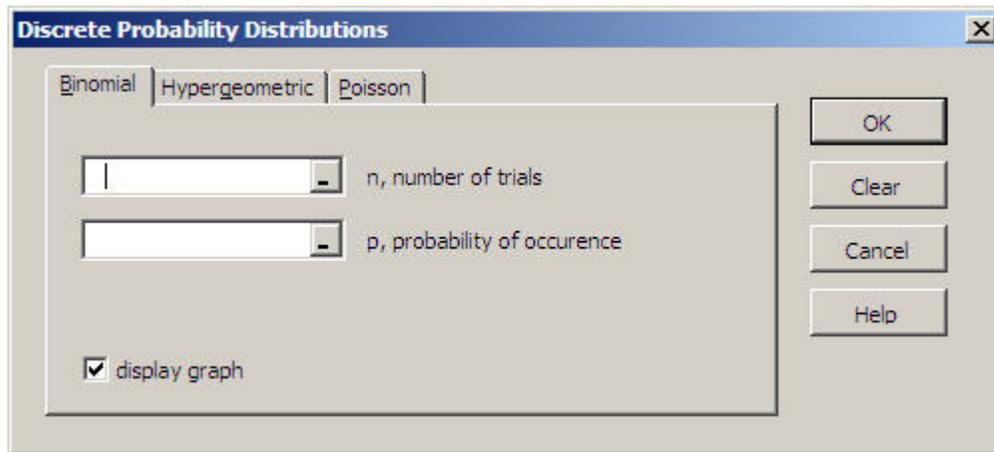


The dialog box titled "Discrete Probability Distributions" has three tabs: "Binomial", "Hypergeometric", and "Poisson". The "Binomial" tab is active. It features two input fields: the first is labeled "n, number of trials" and the second is labeled "p, probability of occurrence". Below these is a checked checkbox labeled "display graph". On the right side, there are four buttons: "OK", "Clear", "Cancel", and "Help".

Enter the values required by each distribution. The Help file gives details regarding size limitations.

The output is formatted to five decimal places so a value that shows as .00000 is not truly zero, it is just zero out to at least five decimal places. Like any MegaStat output, the formats can be changed. You will need to use scientific notation to display very small probabilities.

Continuous Probability Distributions

An example of continuous probability distributions is shown in the Tutorial Example chapter. The Normal Distribution dialog box below shows some other aspects. First of all it shows the calculation of values corresponding to a specified upper tail probability. It also shows that when the mean and standard deviation are anything other than 0 and 1 respectively the labels automatically change from 'z' to 'x'. Compare this dialog box with Figure 9. Use this option for a quick calculation; the options below give graphical output.

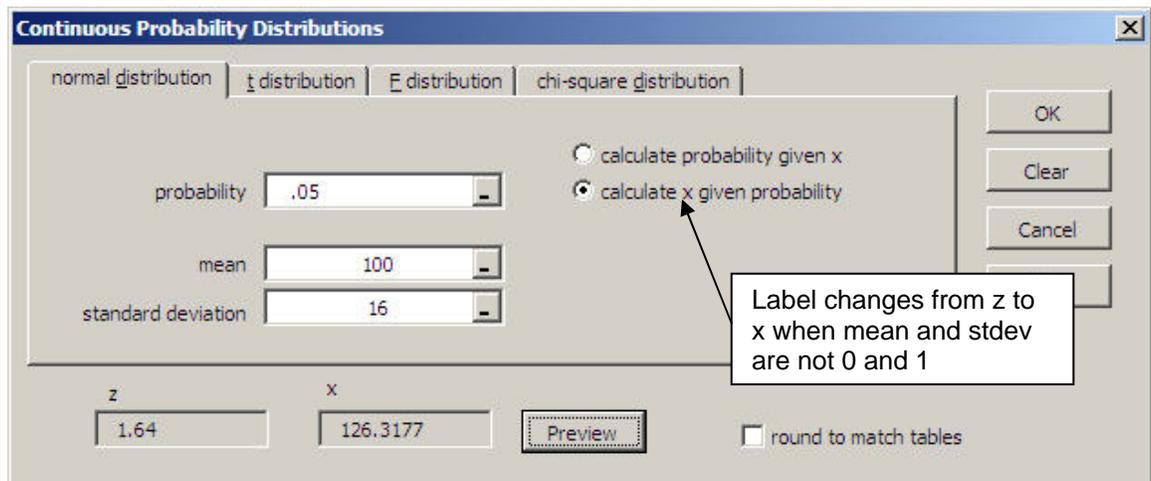


The dialog box titled "Continuous Probability Distributions" has four tabs: "normal distribution", "t distribution", "F distribution", and "chi-square distribution". The "normal distribution" tab is active. It contains input fields for "probability" (value: .05), "mean" (value: 100), and "standard deviation" (value: 16). There are two radio buttons: "calculate probability given x" (unselected) and "calculate x given probability" (selected). Below these are two output fields: "z" (value: 1.64) and "x" (value: 126.3177). A "Preview" button is located between the "z" and "x" fields. At the bottom right, there is a checkbox labeled "round to match tables". A callout box with an arrow pointing to the "calculate x given probability" radio button contains the text: "Label changes from z to x when mean and stdev are not 0 and 1". On the right side, there are buttons for "OK", "Clear", and "Cancel".

Since Excel calculates values to 15 decimal places, the results may not quite match the values found in tables. If you check the 'round to match tables' box, MegaStat will round the calculations to match what you would find in most tables.

Normal Distribution

The normal distribution program gives a graphical display of the normal distribution. Example 2 in the Tutorial chapter shows how to calculate normal curve probabilities. The dialog box below shows how it would be set up to calculate the z-values associated with a .05 two tail probability selected from the dropdown box (.025 in each tail of the distribution) with patterned output.

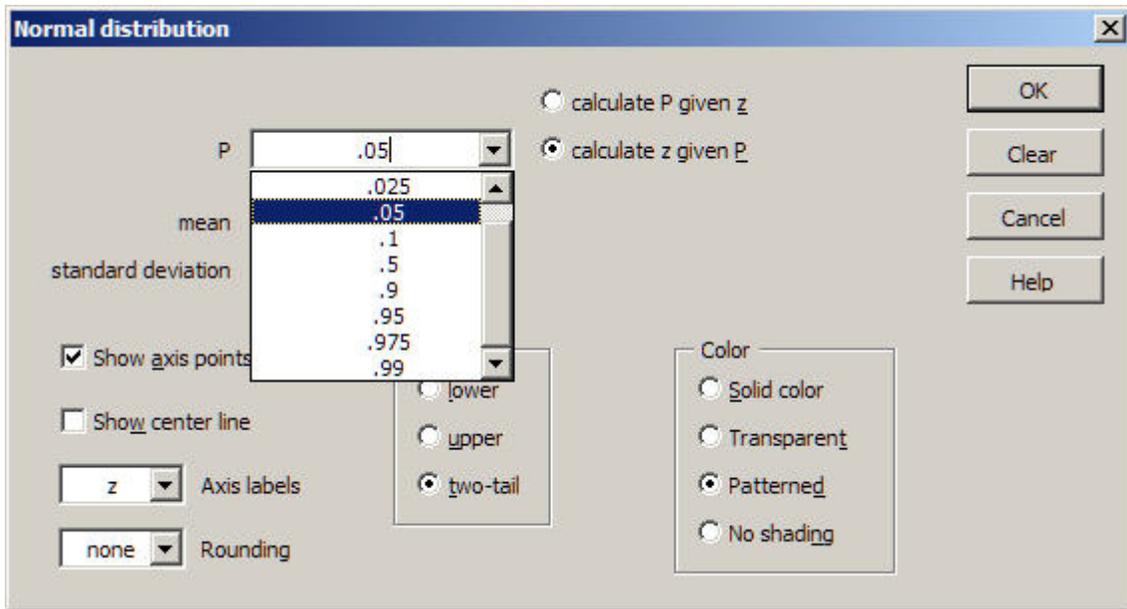

You may type in a probability value if the value you want is not in the list.

After you do an initial output, an Overlay checkbox will appear near the OK button. If you leave it checked, when you click OK the output will be superimposed on the previous output. You may superimpose several outputs. If you are planning outputs that will be covering each other, it will work best to make the first one patterned and subsequent ones transparent.

Notes regarding the options:

Show axis points – This shows input values associated with the shaded areas. The units will be z or X depending on the Axis labels option below.

Show center line – The center line is also a graphics object that can be selected and moved or edited; for example, you may want to make it heavier or change its color.

Axis labels – This option determines the labeling for the tick marks and the axis points. The options are z, X, and none.

Rounding – The options are none, 2, 3, or 4; or you may type a value from 0 to 16. If you select this option, probabilities will be calculated with the z-value rounded to the selected value. Use rounding of 2 to match most tables.

Shading – The two-tail option is only enabled when the input box is P. The input p-value is divided by two and each half is placed in one tail of the distribution.

Color – The solid color is a medium gray; the transparent color is a grayish blue that will show patterns underneath. Two or more overlaid transparent areas will show darker blue; however, it would be better to get a darker blue by editing the area as shown in Example 2 in the tutorial section.

Other notes:

Post output editing: MegaStat creates the normal distribution output by displaying graphical objects (shapes and textboxes). If you double-click any of the areas on the output a 'Format AutoShape' dialog box will appear and you can change the color, pattern and transparency. As shown in Example 2 in the tutorial section, with a little practice you can create very interesting graphical displays.

You may also click any of the axis label textboxes to change the displayed text and/or add text. You may also change the font size and style.

Copying the output: If you want to copy the normal distribution output and paste it into another application such as Word or Powerpoint you need to group all of the objects into one object. You do this as follows:

- Activate the Excel Drawing toolbar with View | Toolbars | Drawing
- Click the 'Select Objects' button
- Draw a rectangle around the entire display. Make sure you select all of the axis textboxes. If you miss some you can redraw the selection box or click the ones you missed by while holding the control key.
- On the Drawing toolbar click Draw | Group.
- Double click any cell to de-activate the selection tool.

You can then use Edit | Copy (or right-click Copy) to copy the object and paste it into another Excel worksheet or another application. When you paste the object use Edit | Paste Special | Picture (Enhanced Metafile).

Display size: The normal distribution output is optimally sized for a 1024 x 768 display. To make it larger or smaller use View | Zoom.

Printing: To make the normal distribution output fit on a printed page without resizing it, you can use Page Setup or Print Preview and select fit to one page.

t Distribution

t

df

calculate P given t
 calculate t given P

Show normal curve
 Show axis points
 Show center line

Shading
 lower
 upper
 two-tail

Color
 Solid color
 Transparent
 Patterned
 No shading

none Rounding

The general operating procedures for the t, F and chi-square distributions are the same as the normal distribution. See Tutorial Example 2 and the normal distribution reference section. The MegaStat help system gives detail regarding specific options for the t distribution.

Note in particular there is an option to superimpose a dashed line normal curve on the t distribution. For degrees of freedom of 30 and larger, the normal and t distributions will be nearly identical.

F Distribution

The screenshot shows the 'F distribution' dialog box. It has a title bar with 'F distribution' and a close button. The main area contains several controls: a label 'F' above a dropdown menu showing '.05'; two radio buttons, 'calculate P given F' (unselected) and 'calculate F given P' (selected); a 'Color' sub-dialog with four radio buttons: 'Solid color' (selected), 'Transparent', 'Patterned', and 'No shading'; two empty dropdown menus for 'df1' and 'df2'; a checked checkbox 'Show axis points'; and a dropdown menu for 'Rounding' showing 'none'. On the right side, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

The general operating procedures for the t, F and chi-square distributions are the same as the normal distribution. See Tutorial Example 2 and the normal distribution reference section. The MegaStat help system gives detail regarding specific options for the F distribution.

The size of the graphical display is scaled to fit the display area and the maximum F value for the horizontal axis is chosen to be slightly larger than the .01 critical value. Thus the absolute size of displays for different degrees of freedom cannot be compared.

Chi-square Distribution

The screenshot shows the 'Chi-square distribution' dialog box. It has a title bar with 'Chi-square distribution' and a close button. The main area contains several controls: a label 'Chi-square' above a dropdown menu showing '.05'; two radio buttons, 'calculate P given Chi-square' (unselected) and 'calculate Chi-square given P' (selected); a 'Color' sub-dialog with four radio buttons: 'Solid color' (selected), 'Transparent', 'Patterned', and 'No shading'; one empty dropdown menu for 'df'; a checked checkbox 'Show axis points'; and a dropdown menu for 'Rounding' showing 'none'. On the right side, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

The general operating procedures for the t, F and chi-square distributions are the same as the normal distribution. See Tutorial Example 2 and the normal distribution reference section. The MegaStat help system gives detail regarding specific options for the chi-square distribution.

The size of the graphical display is scaled to fit the display area and the maximum chi-square value for the horizontal axis is chosen to be slightly larger than the .01 critical value. Thus the absolute size of displays for different degrees of freedom cannot be compared.

Confidence Intervals / Sample Size

For each of the dialog boxes confidence levels of .99, .95, or .90 may be selected by the dropdown arrow or you may type in any other value.

Confidence interval – mean

Confidence Intervals / Sample Size

Confidence interval - <u>m</u> ean	100	Mean
Confidence interval - <u>p</u>	16	Std. Dev.
Sample <u>s</u> ize - mean	26	n
Sample size - (<u>a</u> lpha, <u>b</u> eta)	95%	Confidence Level

z t

lower: 93.537 upper: 106.463

Buttons: OK, Clear, Cancel, Help, Preview

Confidence interval – p

Confidence Intervals / Sample Size

Confidence interval - mean: .5 p

Confidence interval - p: 40 n

Sample size - mean

Sample size - p

Sample size - (alpha, beta): Confidence Level: 95%

lower: 0.345 upper: 0.655

Preview OK Clear Cancel Help

Note: Instead of typing .5 you could have typed 20 and the label would have automatically changed to 'x'

Sample size –mean, p, and mean with specified α and β

Confidence Intervals / Sample Size

Confidence interval - mean: 2 E

Confidence interval - p: 6.5 Std. Dev.

Sample size - mean

Sample size - p

Sample size - (alpha, beta): Confidence Level: 99%

N: 70.081 N rounded up: 71

Preview OK Clear Cancel Help

Confidence Intervals / Sample Size [X]

Confidence interval - <u>m</u> ean	4%	E
Confidence interval - <u>p</u>		
Sample <u>s</u> ize - mean	.5	P
Sample size - p		
Sample size - (alpha, <u>b</u> eta)	Confidence Level	
	95%	

OK
Clear
Cancel
Help

Preview N N rounded up

600.228 601

Confidence Intervals / Sample Size [X]

Confidence interval - <u>m</u> ean	2	E
Confidence interval - <u>p</u>		
Sample <u>s</u> ize - mean	6.5	Std. Dev.
Sample size - p		
Sample size - (alpha, <u>b</u> eta)	α	β
	.01	.01

OK
Clear
Cancel
Help


Preview N N rounded up

228.653 229


Note that the sample size calculation is rounded up to the next higher integer value.

Hypothesis Tests

Mean vs. Hypothesized Values

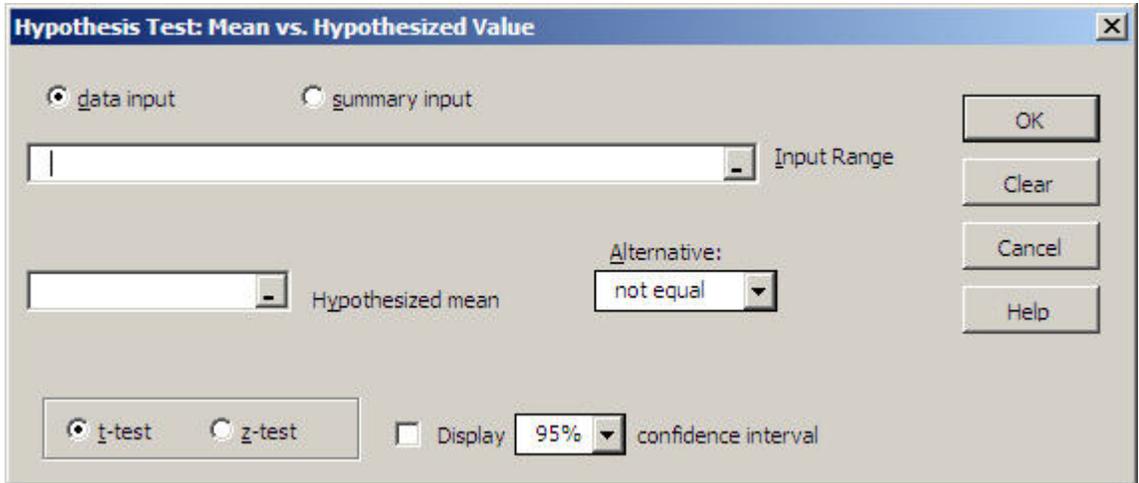

This dialog box is usually used with actual data as shown above; however, there may be situations where you already have calculated values and want to perform the hypothesis test. For example, if cells K14 through K17 contain a label, mean, standard deviation and n respectively, you would click 'summary input' and select the cells as shown below.

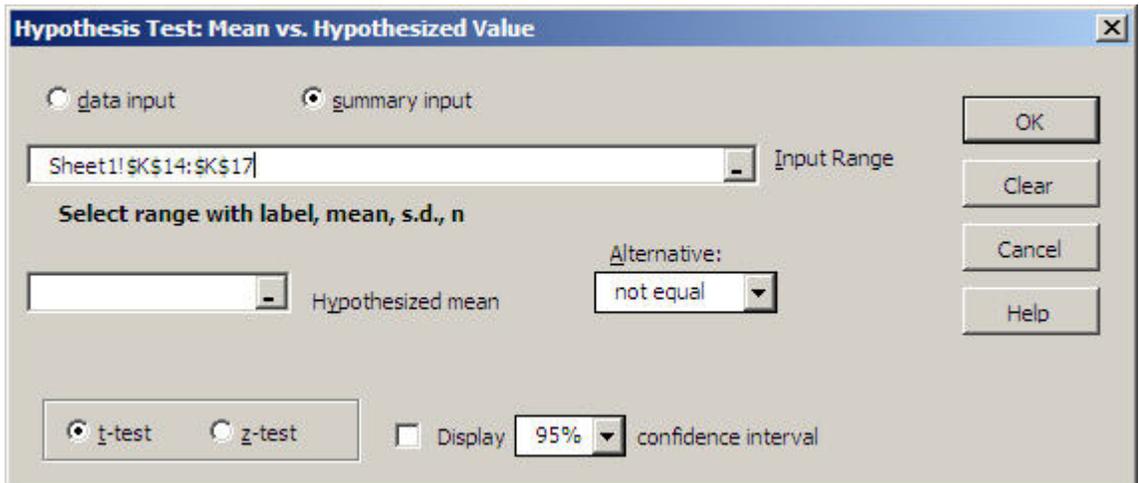

If the summary values are not in contiguous cells you may select any four cells in the proper sequence by holding the CTRL key.

Compare Two Independent Groups

Hypothesis Test: Compare Two Independent Groups

data input summary input

Group 1

Group 2

Hypothesized difference: 0 Alternative: not equal

t-test (pooled variance)
 t-test (unequal variance)
 z-test

Display 95% confidence interval
 Test for equality of variances

OK, Clear, Cancel, Help

All of the data selected for each group will be treated as a single group even if you select multiple columns.

Paired Observations

Hypothesis Test: Paired Observations

data input summary input

Group 1

Group 2

Hypothesized difference: Alternative: not equal

t-test z-test

Display 95% confidence interval

OK, Clear, Cancel, Help

Both groups must have the same number of observations. If your data is already in the form of differences you would use the Mean vs. Hypothesized Value test.

Proportion vs. Hypothesized Value

For this test and comparing two proportions, review the Entering Proportions section of the Tutorial Examples chapter.

The dialog box is titled "Hypothesis Test: Proportion vs. Hypothesized Value". It contains the following fields and controls:

- Observed:** A text input field for p and a spin button for n .
- Hypothesized:** A text input field for p .
- Alternative:** A dropdown menu currently set to "not equal".
- Display:** A checkbox labeled "Display" followed by a dropdown menu set to "95%" and the text "confidence interval".
- Buttons:** "OK", "Clear", "Cancel", and "Help" buttons are located on the right side.

Compare Two Independent Proportions

The dialog box is titled "Hypothesis Test: Compare Two Proportions". It contains the following fields and controls:

- Group 1:** Text input fields for p and n .
- Group 2:** Text input fields for p and n .
- Hypothesized difference:** A text input field containing the value "0".
- Alternative:** A dropdown menu currently set to "not equal".
- Display:** A checkbox labeled "Display" followed by a dropdown menu set to "95%" and the text "confidence interval".
- Buttons:** "OK", "Clear", "Cancel", and "Help" buttons are located on the right side.

Chi-square Variance Test

The screenshot shows a dialog box titled "Chi-square Variance Test" with a close button (X) in the top right corner. The dialog has two radio buttons: "data input" (selected) and "summary input". Below these are two input fields: "Input Range" and "Hypothesized variance". To the right of the "Hypothesized variance" field is a dropdown menu labeled "Alternative:" with "not equal" selected. At the bottom, there is a checkbox labeled "Display" followed by a dropdown menu showing "95%" and the text "confidence interval". On the right side of the dialog, there are four buttons: "OK", "Clear", "Cancel", and "Help".

To compare the variances from two groups use the hypothesis test for comparing two means and check the variance test option

Analysis of Variance

Analysis of Variance

One-Factor ANOVA

Analysis of Variance: One-Factor ANOVA

Input range

Post-Hoc Analysis

When p < .05 Never Always

Plot Data Display partitioning

OK
Clear
Cancel
Help

Within the input range each column will be considered a group. The groups do not have to be the same size so there may be some empty cells – just make the selection block large enough to include the largest group.

The data groups for this procedure must be side by side. For example, if you were doing an ANOVA with three groups the groups might look like this:

	A	B	C	D	E	F
1						
2		Group 1	Group 2	Group 3		
3		23	32	37		
4		25	29	31		
5		24	26	29		
6			33	31		
7			27			
8						

The post-hoc analysis is a table showing the p-values for the pairwise independent groups t-tests and the Tukey simultaneous comparison t-values.

Checking the Plot Data box gives a plot of the data with the group means and grand mean.

All three ANOVA's have a box to check if you wish to display partitioning. This will create output showing how the sums of squares are calculated.

Randomized Blocks ANOVA

Within the input range each column will be considered a treatment and each row will be a block. No missing or invalid data are allowed.

Each row (block) may have a label as well as the columns (treatments). Just remember that labels must be text. If you want to use AutoFill to generate block labels, enter the first two values as '1' and '2' to force them to be text.

The data groups for this procedure must be side by side. For example, if you were doing an ANOVA with three treatments and five blocks the data cells must look like this:

	A	B	C	D	E	F
1						
2			Treatment 1	Treatment 2	Treatment 3	Treatment 4
3		Block 1	23	23	32	37
4		Block 2	25	25	29	31
5		Block 3	24	24	26	29
6		Block 4	27	27	31	34
7		Block 5	28	28	24	33
8						

The post-hoc analysis is a table showing the Tukey simultaneous comparison t-values and p-values for the pairwise independent groups t-test.

Checking the Plot Data box gives a plot of the data with the group means and grand mean. The data points for each block are connected.

Two Factor ANOVA

The data must be in the form shown below. Assume you have two column treatments, three row treatments and three replications per cell:

	A	B	C	D	E
1					
2			Column A	Column B	
3			48.2	55.7	
4		Row 1	53.7	52.5	
5			55.8	58.9	
6			73.0	76.2	
7		Row 2	78.1	78.4	
8			75.4	82.1	
9			52.4	54.0	
10		Row 3	49.7	52.1	
11			50.9	49.9	
12					

All cells must have the same number of replications and no missing data are allowed. You may type in the number of replications per cell or you can use the mouse to select one cell and the program will count the number of replications.

The row treatment labels may be placed in any of the cells to the left of the treatment.

Correlation / Regression Scatterplot

The image shows the 'Scatterplot' dialog box in Microsoft Excel. It features three input fields for 'horizontal axis', 'vertical axis', and 'chart title'. Below these fields are two checkboxes: 'Plot linear regression line' (checked) and 'Force zero intercept'. A 'Display:' section contains three radio buttons: 'Markers' (selected), 'Markers and lines', and 'Lines only'. On the right side of the dialog, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

Both input ranges must be the same size and be in a single column.


A title is not required but it is recommended. The title can have more than one line. Use the scroll bar on the edit box to view multiple lines. You may type in the title or click on cell(s) that contain title text.

Specify if you want the linear regression line forced through the intercept (The r^2 value is not shown for zero intercept since Excel calculates it incorrectly.)

Post output editing: MegaStat will do a good first approximation of the scatterplot, but remember that it is an Excel chart and if you right-click a chart object (e.g., an axis) you go into editing mode where you can make changes. Some common things you might want to fine-tune are:

- Move the text box that contains the regression equation and r^2 if it is covering data points.
- Right-click the regression line (Trendline) and select Format Trendline | Options to extend the line forward or backward or try a non-linear curve fit.
- Rescale the axes. The program attempts to scale the axes properly; however, you can change the scaling to your preference.
- Resize the Scatterplot.

Note: The Scatterplot is linked to the data you selected in the input ranges. This means that if you subsequently change the data, the chart will be updated. Also if you drag any of the data points on the chart, the data sheet will change. If you want to lock it or paste it to another document without linking, do a Copy and Paste Special|Picture into Microsoft Word. It will look just the same, but you cannot do any further editing.

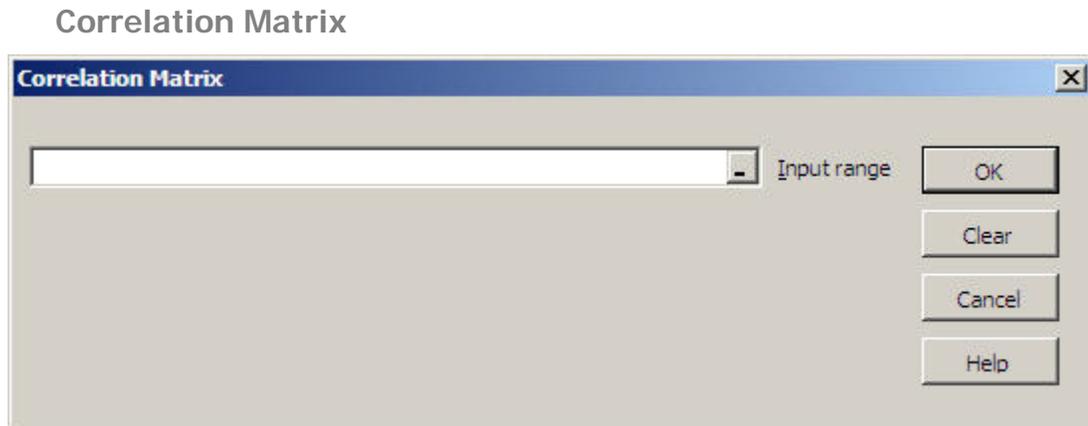

If you want to change the order of the variables you may select multiple data ranges by holding the Ctrl key . Each selection area must have the same number of rows. No missing or invalid data are allowed.

Only the lower half of the correlation table is displayed; however, the upper portion output is in hidden format and may be displayed by formatting the cells.

Regression Analysis

Regression Analysis

Input ranges:

X, Independent variable(s)

Y, Dependent variable

No predictions

No predictions

Predictor values from spreadsheet cells

Type in predictor values

predictor values

Options

95% Confidence Level

Variance Inflation Factors

Standardized Coefficients (betas)

Test Intercept Force Zero Intercept

All Possible Regressions

Stepwise Selection 1 best model of each size

Residuals:

Output Residuals

Diagnostics and Influential Residuals

Durbin-Watson

Plot Residuals by Observation

Plot Residuals by Predicted Y and X

Normal Probability Plot of Residuals

OK

Clear

Cancel

Help

Within the input range each column is considered a variable. If there is more than one independent variable MegaStat will automatically do multiple regression. You may select multiple input ranges by holding the Ctrl key. This is handy if you are doing multiple regression and the independent variables are not contiguous. The independent and dependent variable ranges must have the same number of rows.

If you want to calculate predicted values, click the dropdown arrow and select one of the options (as shown in the dialog box above):

Predictor values from worksheet cells

If you select this option you will need to select an input range for the values of the independent variable(s) to be used for prediction. Within this range each column will correspond to the independent variable(s) and each row will specify a different prediction. For example, if you are doing one prediction for simple regression the predictor range would be a single cell; or if you are doing three predictions for a multiple regression with four independent variables, the predictor range would be three rows by four columns.

The predictor range can be any cells, even in a different sheet; however, the obvious place to put the predictor variables would be right below the independent variables of the input data.

Type in predictor values

The input box allows you to type predictor values for the independent variable. The entries must be in the same order as the independent variables in the input data. The values must be separated by spaces or commas. You may make multiple predictions by typing a semi-colon between each prediction. If you have several predictions and/or several independent variables it will be easier to enter them into worksheet cells and use the method described above.

For example: if you wanted to make three predictions using $X_1 = 20$, $X_2 = 9$; $X_1 = 25$, $X_2 = 12$ and $X_1 = 30$, $X_2 = 15$ you would type in:

20,9;25,12;30,15

You can also enter spaces to make it easier to read

20,9; 25,12; 30,15

(Secret tip: You really don't need the semi-colons and commas if you put one or more spaces between each number. You could enter: 20 9 25 12 30 15)

Select Options:

- Confidence level for confidence intervals.
- Variance Inflation Factors to measure multicollinearity in multiple regression
- Standardized regression coefficients (sometimes called betas)
- Test for zero intercept
- Force zero intercept

-All Possible Regressions

This option prints a summary line for each possible combination of variables in a multiple regression. Since each summary line includes the p-values for the variables in the model, this output is useful for model building since you can easily see which combinations of variables work best.

The number of summary lines is $2^k - 1$ where k is the number of independent variables. Thus 12 variables will generate 4095 regression summaries. Above 10 variables the calculations can take quite a while and there may be memory issues. Stepwise Selection is usually a better option for more than 8 variables. The program still has to calculate the regression summaries but there is a lot less output since only the best regressions are displayed.

-Stepwise Selection

This option is similar All Possible Regression but it displays only the best models for any given number of variables, which gives more compact output.

All Possible Regressions and/or Stepwise Selection are more powerful and flexible than traditional Stepwise Regression. Stepwise Regression determines the one best model where MegaStat not only does this but also shows if there are other models nearly as good.

Selecting All Possible Regressions or Stepwise Selection causes all other options to be deactivated (grayed out). To restore the other options, uncheck All Possible Regressions or Stepwise Selection.

The Force zero intercept option will not work if the slope is negative or the intercept is not close to zero.

You cannot select Test intercept = 0 and Force zero intercept simultaneously. Selecting one will uncheck the other one.

Select Residuals options

- Output of dependent variable, predicted value, residual
This option will automatically be selected if you choose any other residuals option.
- Durbin-Watson
- Plot Residuals by Observation
- Plot Residuals by Predicted Values and by each Independent Variable
- Diagnostic and Influential Residuals
These are advanced options that would be important for upper level courses and research use.
 - --Leverage
Shaded blue if the value is $> 2 * (Nvar + 1) / n$
 - --Studentized Residual
 - --Studentized Deleted Residual
These are t values and they are shaded light blue if the p-value is $\leq .05$ and blue if the p-value is $\leq .01$
 - Cooks D
This value is an F ratio and it is shaded light blue if the p-value is $\leq .80$ and blue if the p-value is $\leq .50$.
- Normal Probability Plot of Residuals
Note: The data values needed to display the Normal Probability Plot are stored in a ChartDataSheet as discussed in the Utilities section.

Time Series / Forecasting

Trendline Curve Fit

Trendline Curve Fit

Input range of time series:

Type of trendline:

Beginning period:

Forecast for periods, starting with period

Options

Confidence Level

Scatterplot

Input Data

Test Intercept

Force Zero Intercept

Residuals

Output Residuals

Durbin-Watson

Plot Residuals

Diagnostics and Influential Residuals

Normal Probability Plot of Residuals

OK
Clear
Cancel
Help

Select a single column of data as the input range of the data to be fit with a trendline (*i.e.*, the dependent variable, Y). The program will create the time series independent variable (X). Then select the type of trendline you wish to fit: Linear, Exponential or Polynomial using the dropdown selection menu.

Select the beginning period for the time series variable (X). This is usually 0 or 1 but it can be any value, for example, a year. If you enter a non-integer value it will be rounded to the nearest integer.

If you wish to make one or more forecasts, specify how many and the starting period for the forecasts.

Specify if you want any of the output options:

Scatterplot of the data with the trendline. (In order to get the scatterplot you must also have the input data displayed so that box will automatically be checked also.

[In rare instances when you specify an exponential curve fit, the scatterplot will not be able to display the trendline. This is caused


when you use large values (e.g., years) for your time series. If you start the time series at $t=0$ the trendline will probably be displayed.]

Display the input data, *i.e.* the time series variable and the input data.

Output of residuals, Durbin-Watson and plot of residuals. Note that you cannot get the latter two unless you output the residuals.

Options for Adjusted R^2 , Test for intercept and Force intercept through zero. (See regression section for details on these items.)

Deseasonalization

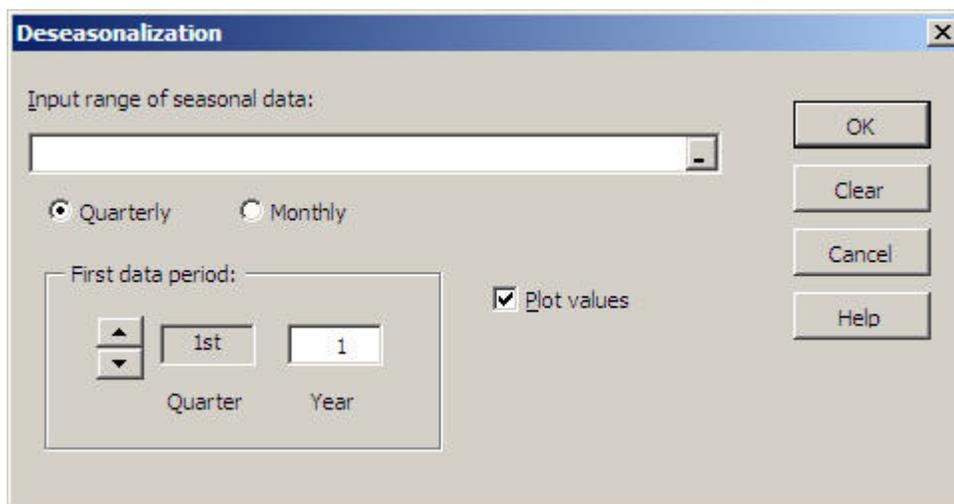


In order to do deseasonalization you must have at least two years of data (*i.e.*, 8 quarters or 24 months). You cannot have missing data; however, you can have a partial year at the beginning and end of the data.

Indicate if the data is quarterly or monthly. Then specify the month and year of the first data value. The example shows the first data value is the 3rd quarter of 1994.

After you have run the analysis you can use the Trendline or Regression options to make predictions using the deseasonalized data. (Make sure to remember to reseasonalize the prediction by multiplying by the appropriate seasonal index.)

Moving Average

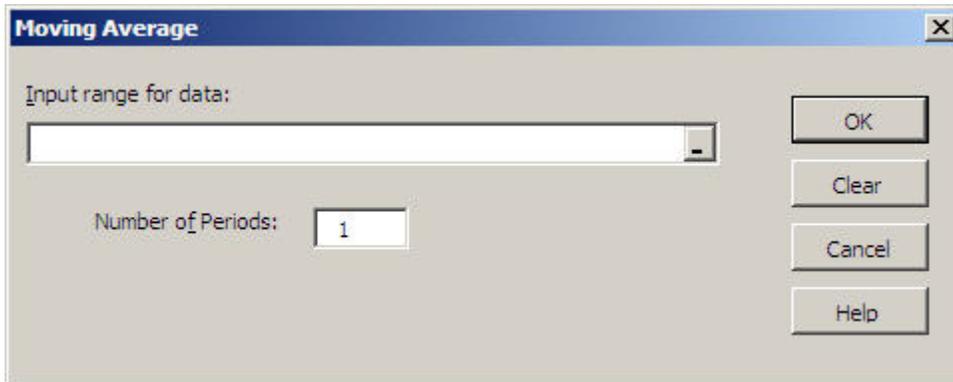


Select a single column of data as the input range. Then specify the number of periods in the moving average (usually 3 to 5 but can be any value between 1 and n). The example above shows a 5 term moving average.

The moving average is displayed adjacent to the last period averaged; however, you can cut/paste or drag/drop the averaged values to position them anywhere.

Exponential Smoothing

Simple Exponential Smoothing

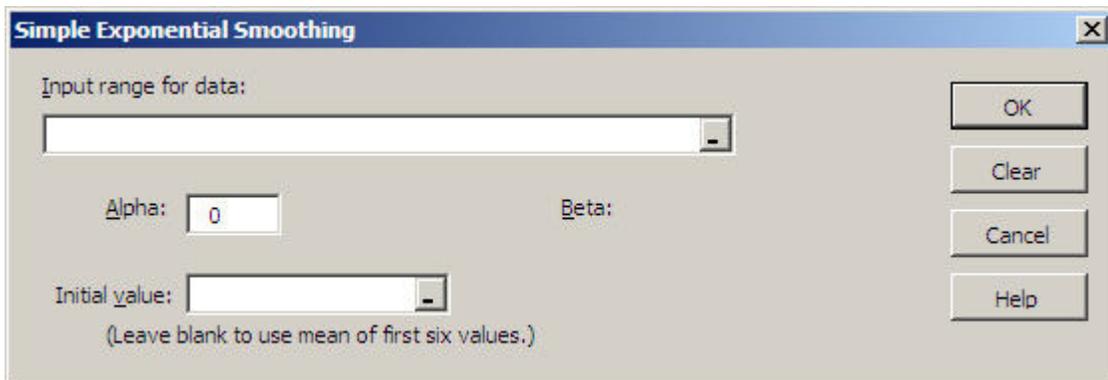

Select a single column of data as the input range of the data to be smoothed.

Specify Alpha, the weight to be given to each new value of the smoothed series. Alpha must be between 0 and 1.

Specify an initial data value for the smoothed series. If you leave the initial value blank, it will use the mean of the first six data values.

Two-factor Exponential Smoothing



The screenshot shows a dialog box titled "Two-factor Exponential Smoothing" with a close button (X) in the top right corner. The dialog contains the following fields and controls:

- Input range for data:** A text box with a dropdown arrow, currently empty.
- Alpha:** A text box containing the value "0".
- Beta:** A text box containing the value "0".
- Initial value:** A text box with a dropdown arrow, currently empty.
- Initial trend:** A text box with a dropdown arrow, currently empty.
- Buttons:** Four buttons are stacked vertically on the right side: "OK", "Clear", "Cancel", and "Help".
- Footnote:** A line of text at the bottom reads: "(Leave blank to estimate from trend of first six values.)"

Select a single column of data as the input range of the data to be smoothed.

Specify Alpha, the weight to be given to each new value of the smoothed series. Alpha must be between 0 and 1. If you leave this blank it will use the intercept of the linear trend of the first six values. Then Specify Beta, the weight to be given to the trend. Beta must be between 0 and 1. If you leave this blank it will use the slope of the linear trend of the first six values.

Chi-Square / Crosstab

Contingency Table

Contingency Table Test for Independence [X]

Input range

Input range may include row/column headings but do not select totals.

Output Options

<input checked="" type="checkbox"/> chi-square	<input type="checkbox"/> Expected values	<input type="checkbox"/> Phi coefficient
<input type="checkbox"/> % of row	<input type="checkbox"/> O - E	<input type="checkbox"/> Coefficient of contingency
<input type="checkbox"/> % of column	<input type="checkbox"/> (O - E) ² / E	<input type="checkbox"/> Cramér's V
<input type="checkbox"/> % of total	<input type="checkbox"/> % of chi-square	<input type="checkbox"/> Fisher Exact Test

OK
Clear
Cancel
Help

You may include row and column headings in the input range; however, you should not include row or columns totals. The table cannot contain any empty or non-numeric cells

Click on the Output Options checkboxes to select the values to be output. In general, it is not a good idea to select all of the options for one output since this will give a cluttered output.

Crosstabulation


The screenshot shows the 'Crosstabulation' dialog box. It features a title bar with the text 'Crosstabulation' and a close button. The dialog is organized into three main sections. The first section, 'Row variable', contains two input fields: 'Data range' and 'Specification range'. The second section, 'Column variable', also contains two input fields: 'Data range' and 'Specification range'. The third section, 'Output Options', contains a grid of nine checkboxes. The 'chi-square' checkbox is checked, while all other checkboxes are unchecked. On the right side of the dialog, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

This option calculates a two-factor crosstabulation table from qualitative data.

Select the input data ranges for the row and column variables. Then select the specification range for the row and column variables. (See the discussion of specification ranges under Qualitative Frequency Distributions.)

Click on the Output Options checkboxes to select the values to be output. If all you want are the counts, leave all options unchecked.

Goodness of Fit Test

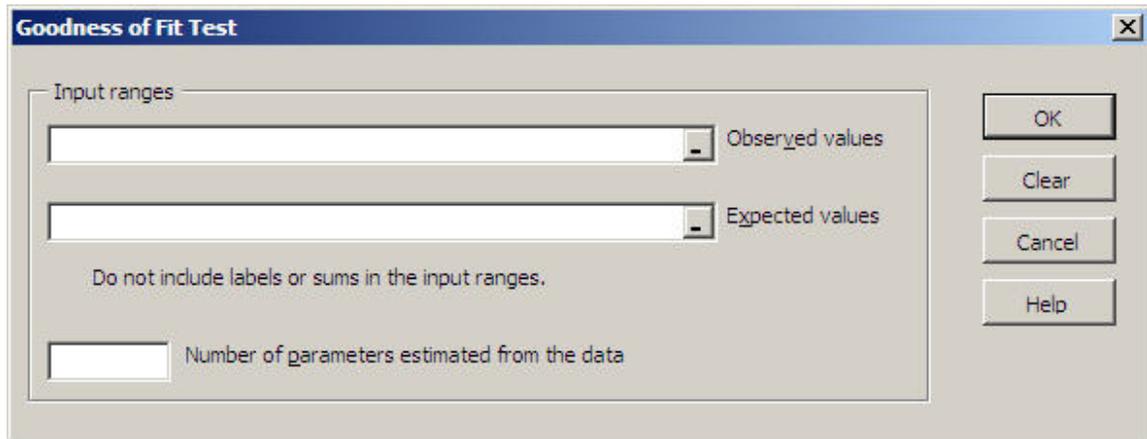


The screenshot shows the 'Goodness of Fit Test' dialog box. It features a title bar with the text 'Goodness of Fit Test' and a close button (X). The main area is divided into several sections. At the top, there is a label 'Input ranges' above two text boxes. The first text box is labeled 'Observed values' and the second is labeled 'Expected values'. Below these two text boxes, there is a line of text that reads 'Do not include labels or sums in the input ranges.' At the bottom of the main area, there is a text box labeled 'Number of parameters estimated from the data'. To the right of the main area, there are four buttons stacked vertically: 'OK', 'Clear', 'Cancel', and 'Help'.

Select the input data ranges for the observed and expected frequencies. You must not include labels in the range. Both ranges must include the same number of cells although they don't have to be the same shape; however, if the ranges are not the same shape, carefully check the output to make sure observed and expected values were paired properly.

Specify the number of input parameters estimated from the data. The default value is none. For example, if you were doing a Goodness of Fit for a normal distribution and you used the mean and standard deviation from the actual data to find the expected values, then this value would be 2.

Nonparametric Tests


Sign Test

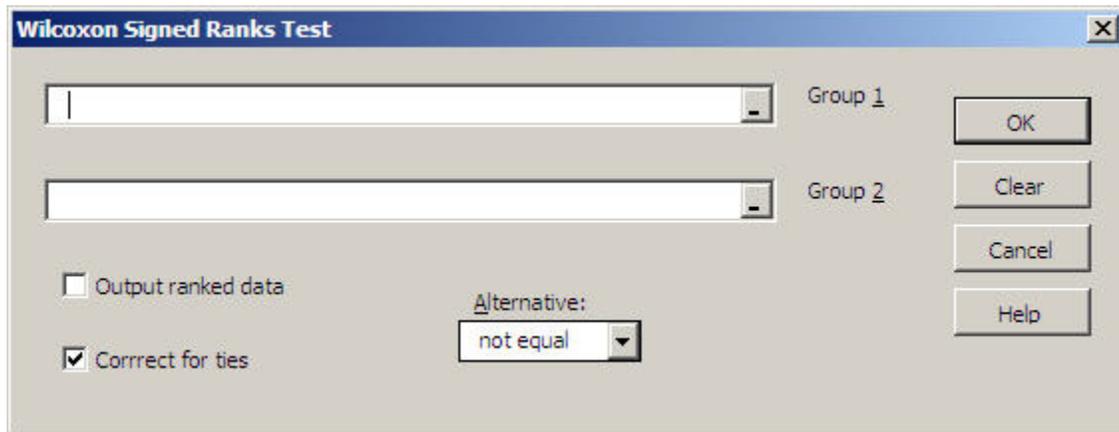

The screenshot shows the 'Wilcoxon Signed Ranks Test' dialog box. It features two input fields for 'Group 1' and 'Group 2'. Below these, there are two checkboxes: 'Output ranked data' (unchecked) and 'Correct for ties' (checked). An 'Alternative:' dropdown menu is set to 'not equal'. On the right side, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

This test can also be performed with the binomial distribution with n = sample size and p = .5.

Runs Test for Random Sequence

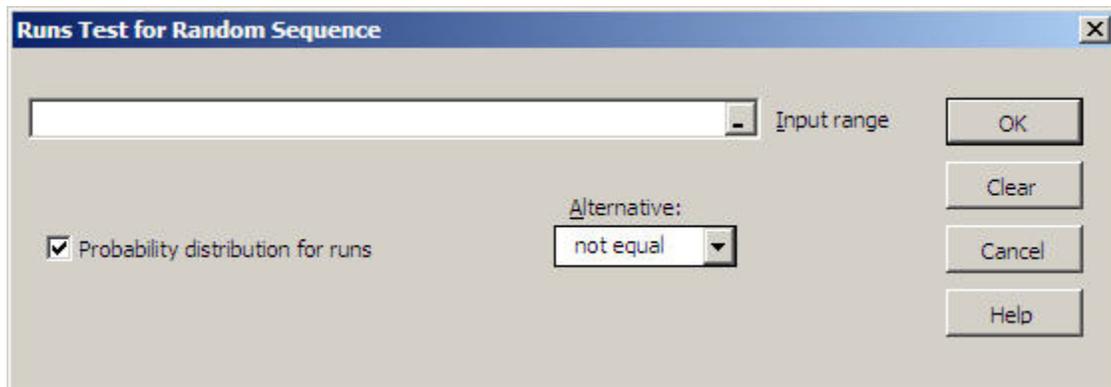

The screenshot shows the 'Runs Test for Random Sequence' dialog box. It has a single 'Input range' field. Below it, there is a checkbox for 'Probability distribution for runs' which is checked. An 'Alternative:' dropdown menu is set to 'not equal'. On the right side, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

The program expects each cell in the input range to contain one of two unique values and it tests whether there are too few or too many runs than would be expected by chance. The two values can be either alpha or numeric but if more than two different values are detected in the range an error message will be displayed.

If you want to use this test to check runs above and below the median, use the Excel IF function to code your data into two values representing above and below the median.

Note: The z-value is calculated using a correction for continuity.

Check if you want to display the complete probability distribution for the total number of runs. Hint: If you want to see the probability distribution and do not have a set of data, create a dummy dataset with n1 A's and n2 B's (or any two values).

Wilcoxon – Mann/Whitney Test

The screenshot shows a dialog box titled "Wilcoxon - Mann/Whitney Test". It has a blue title bar with a close button. The main area is light gray. On the left, there are two empty text input fields. To the right of the first field is the label "Group 1", and to the right of the second is "Group 2". Below these are two checkboxes: "Output ranked data" (unchecked) and "Correct for ties" (checked). To the right of the checkboxes is an "Alternative:" label above a dropdown menu showing "not equal". At the bottom center, there is a text box containing "Select lower, upper or two-tail test". On the right side, there are four buttons: "OK", "Clear", "Cancel", and "Help".

This test works with ranked data; however, the data does not have to be ranked. The program will convert the data to ranks as required by the test.

If you check that you want to output ranked data, the ranked data will be on the output sheet; your original data will not be changed.

The default is to correct for ties and generally should be selected.

Wilcoxon – Signed Rank Test


The screenshot shows a dialog box titled "Wilcoxon Signed Ranks Test". It has a blue title bar with a close button. The main area is light gray. On the left, there are two empty text input fields. To the right of the first field is the label "Group 1", and to the right of the second is "Group 2". Below these are two checkboxes: "Output ranked data" (unchecked) and "Correct for ties" (checked). To the right of the checkboxes is an "Alternative:" label above a dropdown menu showing "not equal". On the right side, there are four buttons: "OK", "Clear", "Cancel", and "Help".

This test works with ranked data; however, the data does not have to be ranks. The program will convert the data to ranks as required by the test. Since this test works with paired observations, both groups must be the same size.

If you check that you want to output ranked data, the ranked data will be on the output sheet; your original data will not be changed.

The default is to correct for ties and generally should be selected.

Kruskal – Wallis Test

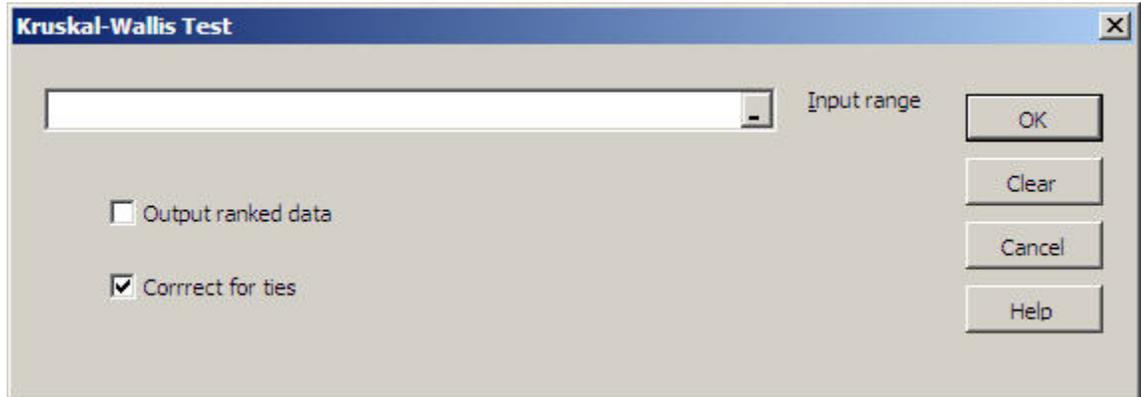


Within the input range each column will be considered a group. The groups do not have to be the same size so there may be some empty cells – just make the selection block large enough to include the largest group. See One Factor ANOVA for details on data layout.

This test works with ranked data; however, the data does not have to be ranks. The program will convert the data to ranks as required by the test.

If you check that you want to output ranked data, the ranked data will be on the output sheet; your original data will not be changed.

The default is to correct for ties and generally should be selected.

Friedman Test

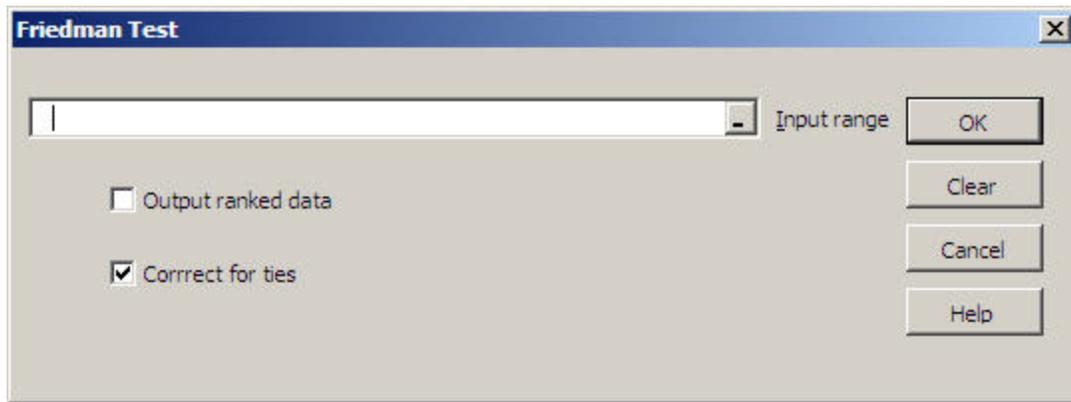

The screenshot shows a dialog box titled "Friedman Test". It features a text input field for "Input range", a checkbox for "Output ranked data" which is currently unchecked, and a checkbox for "Correct for ties" which is checked. To the right of the input field and checkboxes are four buttons: "OK", "Clear", "Cancel", and "Help".


Within the input range each column will be considered a treatment and each row will be a block. No missing or invalid data are allowed. See Randomized Blocks ANOVA for details on data layout.

This test works with ranked data; however, the data does not have to be ranks. The program will convert the data to ranks as required by the test.

If you check that you want to output ranked data, the ranked data will be on the output sheet; your original data will not be changed.

The default is to correct for ties and generally should be selected.

Kendall Coefficient of Concordance

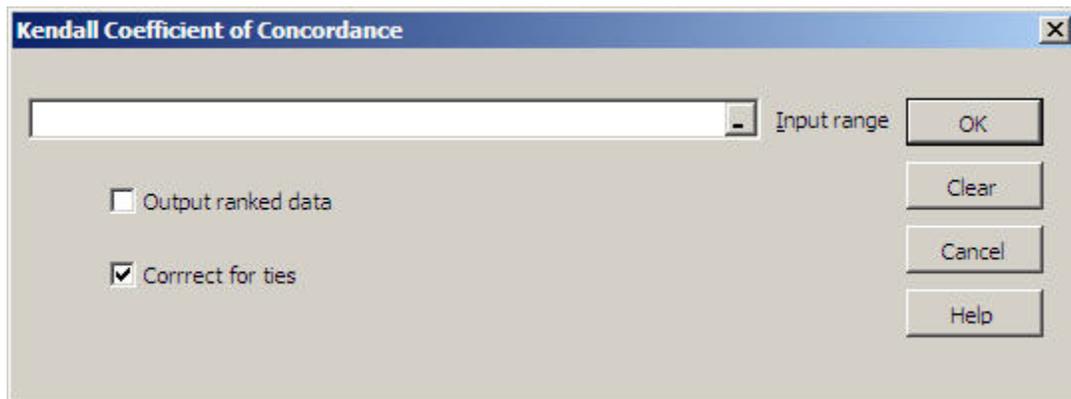

The screenshot shows a dialog box titled "Kendall Coefficient of Concordance". It features a text input field for "Input range", a checkbox for "Output ranked data" which is currently unchecked, and a checkbox for "Correct for ties" which is checked. To the right of the input field and checkboxes are four buttons: "OK", "Clear", "Cancel", and "Help".


Within the input range each column represents an item being judged and each row represents a judge. No missing or invalid data are allowed.

This test works with ranked data; however, the data does not have to be ranks. The program will convert the data to ranks as required by the test.

If you check that you want to output ranked data, the ranked data will be on the output sheet; your original data will not be changed.

The default is to correct for ties and generally should be selected

Spearman Coefficient of Rank Correlation

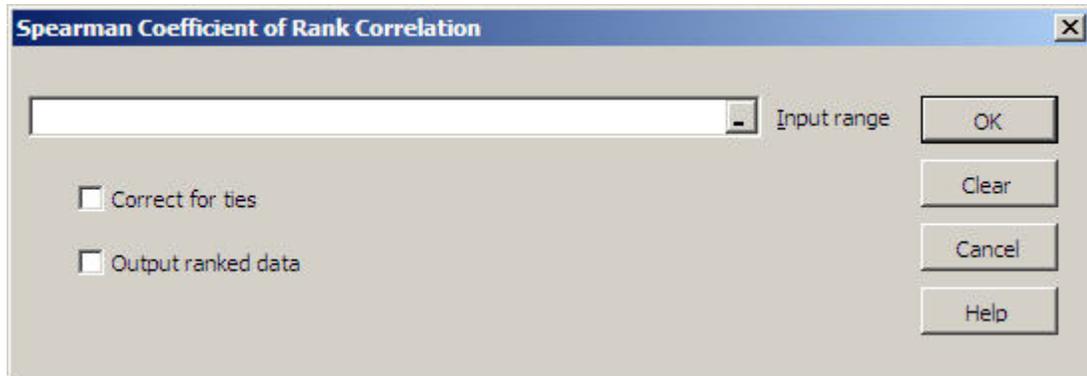


Within the input range each column will be considered a variable. No missing or invalid data are allowed.

This test works with ranked data; however, the data does not have to be ranks. The program will convert the data to ranks as required by the test. The program corrects for tied ranks.

Check whether you want to correct for ties and check whether you want to output the ranked data. The ranked data will be on the output sheet; your original data will not be changed.


Fisher Exact Test

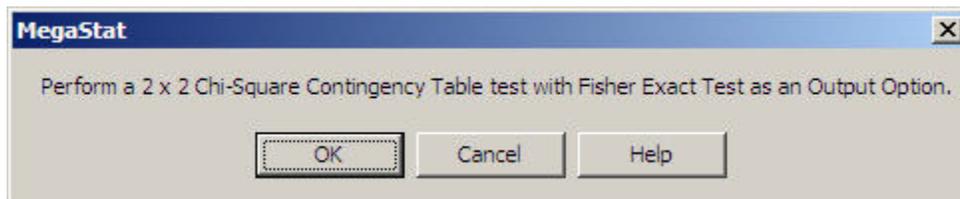

This test is an output option of the chi-square Contingency Table Test and assumes you have data in the form of a contingency table. When you click OK the Contingency Table Test will be loaded with the Fisher Exact Test checked as an output option. You may also select other output options.

Quality Control Process Charts

This option allows you to plot the most common quality control process charts.

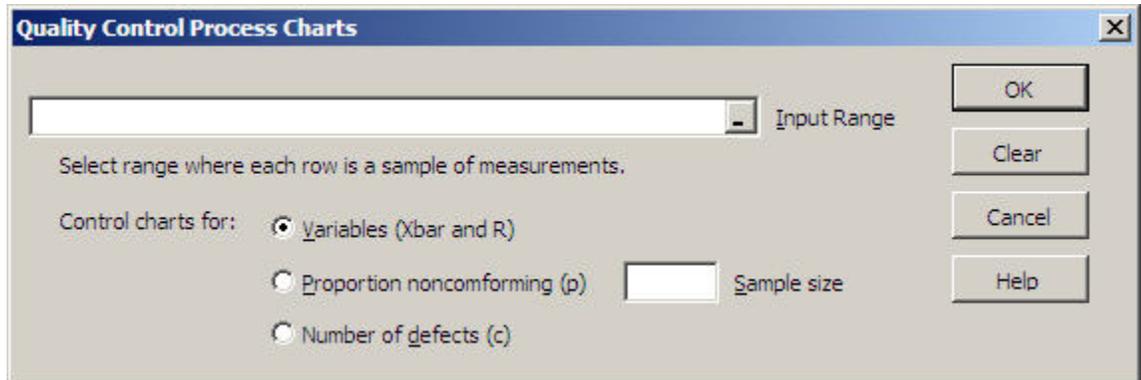

The dialog box titled "Quality Control Process Charts" features a blue title bar with a close button (X) in the top right corner. Below the title bar is a text input field labeled "Input Range" with a small downward arrow on its right side. Underneath this field is the instruction "Select range where each row is a sample of measurements." Below the instruction is the label "Control charts for:" followed by three radio button options: "Variables (Xbar and R)" (which is selected), "Proportion nonconforming (p)", and "Number of defects (c)". To the right of the "Proportion nonconforming (p)" option is a small text input field labeled "Sample size". On the right side of the dialog box, there are four buttons stacked vertically: "OK", "Clear", "Cancel", and "Help".

Control chart for variables (Xbar and R chart)

Select a range of data where each row is a sample of measurements. You may have missing data in any sample; however, the sample size for the chart will be determined by the number of columns in the selected range.

Control chart for proportion nonconforming (p chart)

Specify a sample size and select a range where the values are the proportion or number of defective items in each sample. If the number is less than one it will be considered a proportion; if the number is greater than or equal to one it will be divided by the specified sample size to calculate the proportion.

Control chart for number of defects per sample (c chart)

Select a range where each value is the number of defects in a sample.

Generate Random Numbers

The screenshot shows the 'Random Number Generation' dialog box. It features a title bar with a close button. The main area includes a text input field for 'Number of values to be generated', a 'Decimal Places: max' spinner, and two radio buttons: 'Live functions' (selected) and 'Fixed values'. Below these are three buttons for distribution types: 'Uniform', 'Normal', and 'Exponential'. The 'Uniform' button is selected, and it is associated with 'Minimum' and 'Maximum' text boxes. On the right side, there are four buttons: 'OK', 'Clear', 'Cancel', and 'Help'.

If you specify live functions MegaStat places Excel functions in the specified number of cells. You may recalculate the values by pressing the F9 function key. If you find a set of values you want to keep, you can 'freeze' them by selecting the cells and doing a Copy followed by a Paste Special | Values.

If you select uniform random numbers you need to specify the minimum and maximum values; the normal distribution will need a mean and standard deviation; and the exponentially distributed numbers require, μ , the mean rate of occurrence.

The exponential distribution creates a distribution skewed to the right. If you want a distribution skewed to the left, subtract the values from a constant larger than the largest value.